

# REMOTE CONTROL Code for EIP-1000T

2005/11/27


No.	Key Description	Binary															HEX						
		System Code					Data Code										Judgement of frame		System Code		Data Code		Judgement of frame
		C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15							
1	Standby	1	0	1	1	0	0	1	1	0	1	0	0	1	1	0	0	D	9	6	1		
2	Power ON	1	0	1	1	0	0	1	1	0	1	0	1	0	1	0	0	D	5	6	1		
3	Keystone	1	0	1	1	0	1	1	0	1	0	0	0	1	1	0	0	D	8	B	1		
4	Menu	1	0	1	1	0	0	0	1	0	0	1	1	1	1	0	0	D	C	4	1		
5	Cursol Up	1	0	1	1	0	0	0	1	1	1	0	0	1	1	0	0	D	9	C	1		
6	Cursol Left	1	0	1	1	0	0	0	0	0	1	0	1	0	1	0	0	D	5	0	1		
7	Cursol Right	1	0	1	1	0	1	1	1	1	0	0	1	0	1	0	0	D	4	F	1		
8	Cursol Down	1	0	1	1	0	1	0	1	1	1	0	0	1	1	0	0	D	9	D	1		
9	Enter	1	0	1	1	0	1	1	1	0	1	0	1	0	1	0	0	D	5	7	1		
10	Return	1	0	1	1	0	1	0	0	1	1	0	1	0	1	0	0	D	5	9	1		
11	Picture Mode	1	0	1	1	0	0	0	0	0	0	0	1	0	1	0	0	D	4	0	1		
12	Freeze	1	0	1	1	0	1	0	1	1	0	0	0	1	1	0	0	D	8	D	1		
13	AV Mute	1	0	1	1	0	1	0	0	1	0	1	1	0	1	0	0	D	6	9	1		
14	Vol (+)	1	0	1	1	0	0	0	1	0	1	0	0	0	1	0	0	D	1	4	1		
15	Vol (-)	1	0	1	1	0	1	0	1	0	1	0	0	0	1	0	0	D	1	5	1		
16	RGB1 (Input1)	1	0	1	1	0	1	0	1	0	1	1	0	0	1	0	0	D	3	5	1		
17	RGB2 (Input2)	1	0	1	1	0	0	1	1	0	1	1	0	0	1	0	0	D	3	6	1		
18	Video1 (Input3)	1	0	1	1	0	0	1	0	0	1	1	0	0	1	0	0	D	3	2	1		
19	Video2 (Input4)	1	0	1	1	0	1	1	0	0	1	1	0	0	1	0	0	D	3	3	1		
20	Auto Sync	1	0	1	1	0	0	1	0	1	1	1	1	1	1	0	0	D	F	A	1		
21	Resize	1	0	1	1	0	0	1	1	1	1	0	1	0	1	0	0	D	5	E	1		

**remote controller relevant document**

1. format of Sharp's 15 bit for remote controller


Remote controller outputs the party of surface and reverse of 15 bit as one frame.

1-1. frame cycle

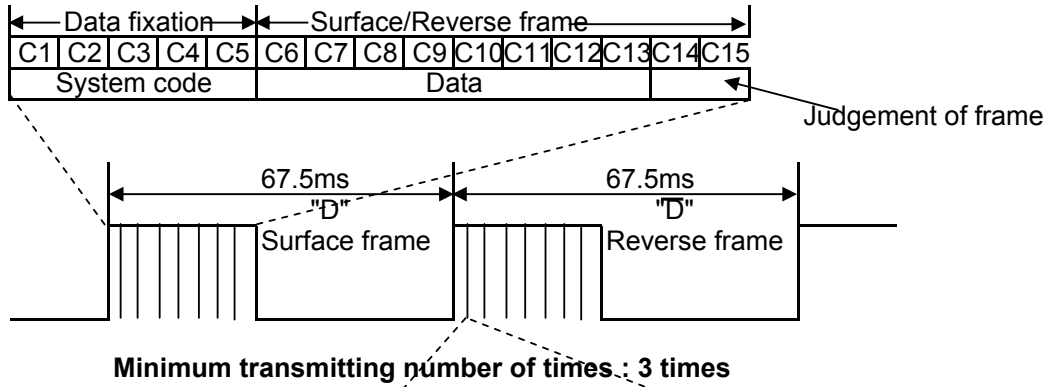


**Minimum transmitting number of times : 3 times**

1-2. data

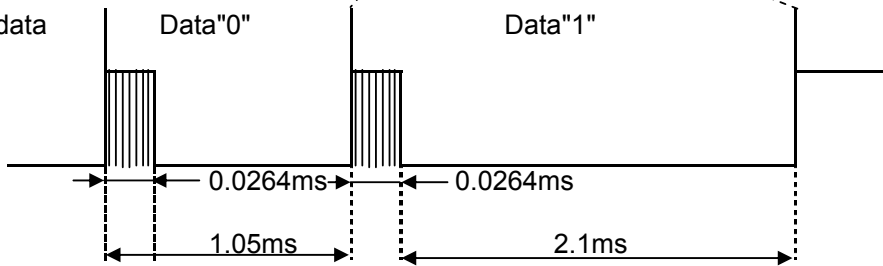

1-3. carrier

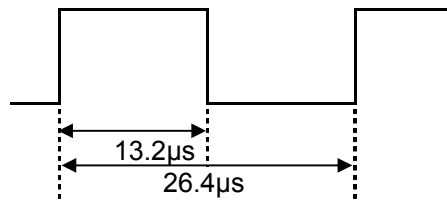

Carrier frequency : 38kHz (455kHz/12)  
Duty ratio : 1:1