

REMOTE CONTROL Code for EIP-2500/200/3000N/2500A/3000NA

2007/4/19


No.	Key Description	Binary														HEX						
		System Code					Data Code									Judgement of frame		System Code		Data Code		Judgement of frame
		C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15						
1	Standby	1	0	1	1	0	0	1	1	0	1	0	0	1	1	0	0	D	9	6	1	
2	Power ON	1	0	1	1	0	0	1	1	0	1	0	1	0	1	0	1	0	D	5	6	1
3	Keystone	1	0	1	1	0	1	1	0	1	0	0	0	1	1	0	1	0	D	8	B	1
4	Menu	1	0	1	1	0	0	0	1	0	0	0	1	1	1	0	0	D	C	4	1	
5	Cursol Up	1	0	1	1	0	0	0	1	1	1	0	0	1	1	0	0	D	9	C	1	
6	Cursol Left	1	0	1	1	0	0	0	0	0	1	0	1	0	1	0	0	D	5	0	1	
7	Cursol Right	1	0	1	1	0	1	1	1	1	0	0	1	0	1	0	0	D	4	F	1	
8	Cursol Down	1	0	1	1	0	1	0	1	1	1	0	0	1	1	0	0	D	9	D	1	
9	Enter	1	0	1	1	0	1	1	1	0	1	0	1	0	1	0	0	D	5	7	1	
10	Return	1	0	1	1	0	1	0	0	1	1	0	1	0	1	0	0	D	5	9	1	
11	Break Timer	1	0	1	1	0	0	0	1	0	1	1	0	1	1	0	0	D	B	4	1	
12	Picture Mode	1	0	1	1	0	0	0	0	0	0	0	1	0	1	0	0	D	4	0	1	
13	Freeze	1	0	1	1	0	1	0	1	1	0	0	0	1	1	0	0	D	8	D	1	
14	AV Mute	1	0	1	1	0	1	0	0	1	0	1	1	0	1	0	0	D	6	9	1	
15	Vol (+)	1	0	1	1	0	0	0	1	0	1	0	0	0	1	0	0	D	1	4	1	
16	Vol (-)	1	0	1	1	0	1	0	1	0	1	0	0	0	1	0	0	D	1	5	1	
17	RGB1 (Input1)	1	0	1	1	0	1	0	1	0	1	1	0	0	1	0	0	D	3	5	1	
18	RGB2 (Input2)	1	0	1	1	0	0	1	1	0	1	1	0	0	1	0	0	D	3	6	1	
19	Video1 (Input3)	1	0	1	1	0	0	1	0	0	1	1	0	0	1	0	0	D	3	2	1	
20	Video2 (Input4)	1	0	1	1	0	1	1	0	0	1	1	0	0	1	0	0	D	3	3	1	
21	Auto Sync	1	0	1	1	0	0	1	0	1	1	1	1	1	1	0	0	D	F	A	1	
22	Resize	1	0	1	1	0	0	1	1	1	1	0	1	0	1	0	0	D	5	E	1	

remote controller relevant document


1. format of Sharp's 15 bit for remote controller

Remote controller outputs the party of surface and reverse of 15 bit as one frame.

1-1. frame cycle

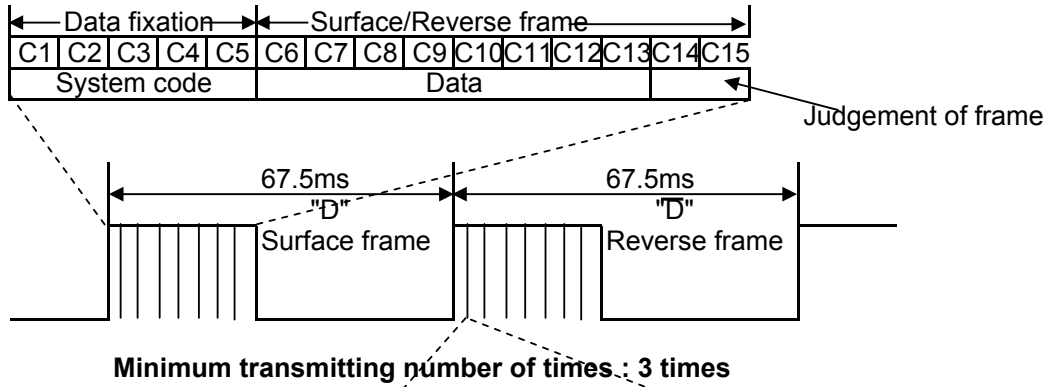

1-2. data

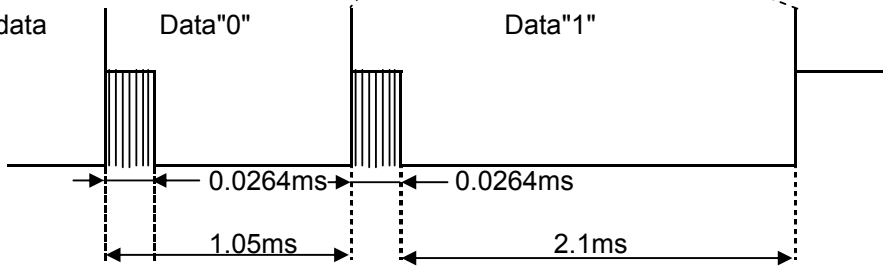

1-3. carrier

