




- 6,000 Lumens Brightness
- Short Throw Lens (0.679-0.82:1)
- Long-life Laser + Phosphor Light Source
- LCD + Laser Optical Engine
- Supports 4K Input
- Flexible Installation:
 - 360° free orientation
 - Pin/Barrel Correction
 - 4/6 point Keystone Correction
 - Lens Shift

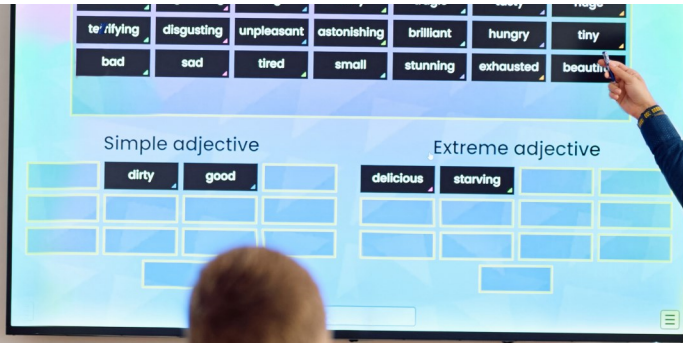

C602S

WUXGA 3LCD Laser Short Throw Projector

Key Features

- 6,000 center lumens bright with 80% uniformity and a 5,000,000:1 contrast ratio.
- High brightness and contrast with long life 20,000 hour Laser Light Source.
- 10-bit color processing, for superior color reproduction.
- Native WUXGA resolution. Compatible with inputs up-to UXGA, WUXGA and 4K.
- Supports analog and digital video input in all color standards up-to 1080p.
- Supports 4K (3840x2160@60Hz) video input via HDMI.
- Short Throw Lens (0.679-0.82:1) with manual zoom and focus.
- Horizontal, Vertical & Corner Keystone Correction.
- Pincushion/Barrel & 6 point Geometric Correction.
- Vertical Manual Lens Shift. Wired network control.
- Compatible with Crestron RoomView™ & AMX Device Discovery Technology.
- Built-in 16 Watt amplifier and speaker system. Closed Caption decoding.



C602S

WUXGA 3LCD Laser Projector



Specifications

Model		C602S
Display Type		0.64" 3LCD
Resolution		WUXGA (1920 x 1200)
Aspect Ratio		16:10
Brightness (Center Lumens)		6,000 lumens
Contrast Ratio		5,000,000:1
Projection Light Source		Laser
Light Source Life		20,000 hours
Image Diagonal		30-300"
Lens (F Value / Focal Length)		f: 1.7-1.8; FL: 0.38-0.46 in (9.66-11.65 mm)
Zoom Ratio		Manual x 1.2
Throw Distance		1.4-17.4 ft (0.44-5.30 m)
Throw:Width Ratio		0.679-0.82:1
Lens Shift		V: + 50% (Manual)
Keystone Correction		V: +/- 30° H: +/- 30°, Corner Keystone
Projection Elevation Adjustment		up-to 3.5°
Scanning Frequency		H Sync. 15-135 KHz, V Sync. 24-85 Hz
Dot Clock		up-to 160 MHz
Input Signals - Computer		4K (3840 x 2160) - VGA (640 x 480)
Input Signals - Video		1080 i/p, 720 p, 576 i/p, 480 i/p
Terminal	HDMI In	HDMI x 2
	VGA In	Dsub15 x 1
	USB	USB Type A x 1 (Memory Viewer)
	USB	USB Type B x 2 (Firmware)
	HDMI Out	HDMI x 1
	VGA Out	Dsub15 x 1
	Audio In	3.5mm MiniStereo x 1
	Audio Out	3.5mm MiniStereo x 1
	RS-232	Dsub9 x 1
	LAN	RJ45 x 1
Built-in Speaker		Mono 16 Watt
Fan Noise (Eco / Normal)		29 dB / 39 dB
Dimensions (H x W x D)		5.0 x 15.4 x 13.5 in (12.8 x 39.0 x 34.4 cm)
Weight		12.6 lb (5.7 kg)
Power Requirements		100-240V AC, 50/60 Hz
Power Consumption		0.5 W in Eco Standby mode, up-to 330 W
Thermal Dissipation		1,126 BTU
Standard Accessories		Detachable AC Power Cord, HDMI Cable, Quick Start Guide, Remote Control

Eiki International, Inc.

22552 Avenida Empresa, Rancho Santa Margarita, CA 92688

Phone: 800-242-3454 · Email: usa@eiki.com · Web: www.eiki.com

Specifications subject to change without notice.

EIKI® is a registered trademark of EIKI International, Inc.

3LCD and 3LCD Logo are registered trademark of Seiko Epson Corporation.


HDMI® is a registered trademark of HDMI Licensing LLC.

Crestron Roomview™ is a registered trademark of Crestron Electronics, Inc


©2025 Eiki International, Inc.

2025/08-V1 GW

Dimensions

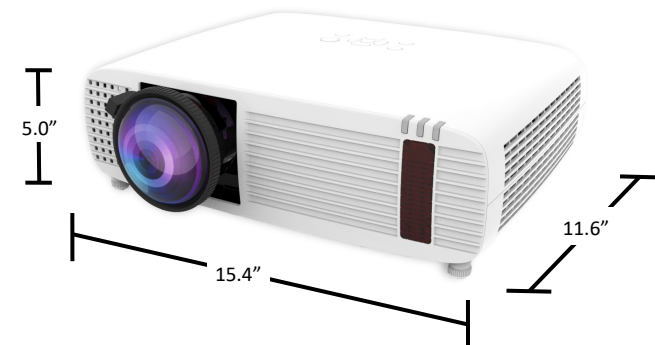

Terminals

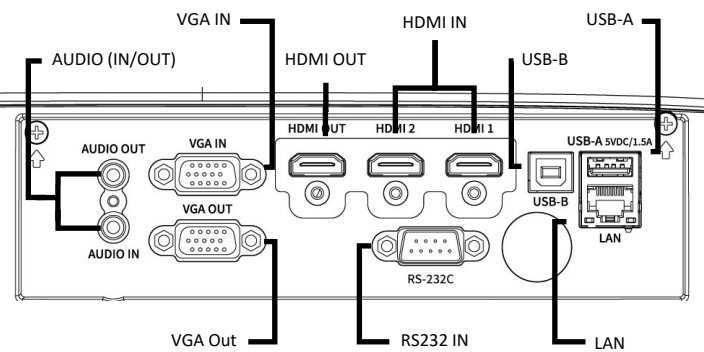

Lens Specs

1.2X Manual Zoom and Focus Lens

f: 1.7-1.8; FL: 0.38-0.46 in (9.66-11.65 mm)

Throw to Width: 0.679-0.82:1

		Screen Width (feet)				
		4	6	10	12	16
Throw Distance (feet)	Wide	2.7	4.0	6.7	8.1	10.8
	Tele	3.3	4.9	8.2	9.8	13.1