

EIP-10V

XGA "All-in-One" DLP™ Projector

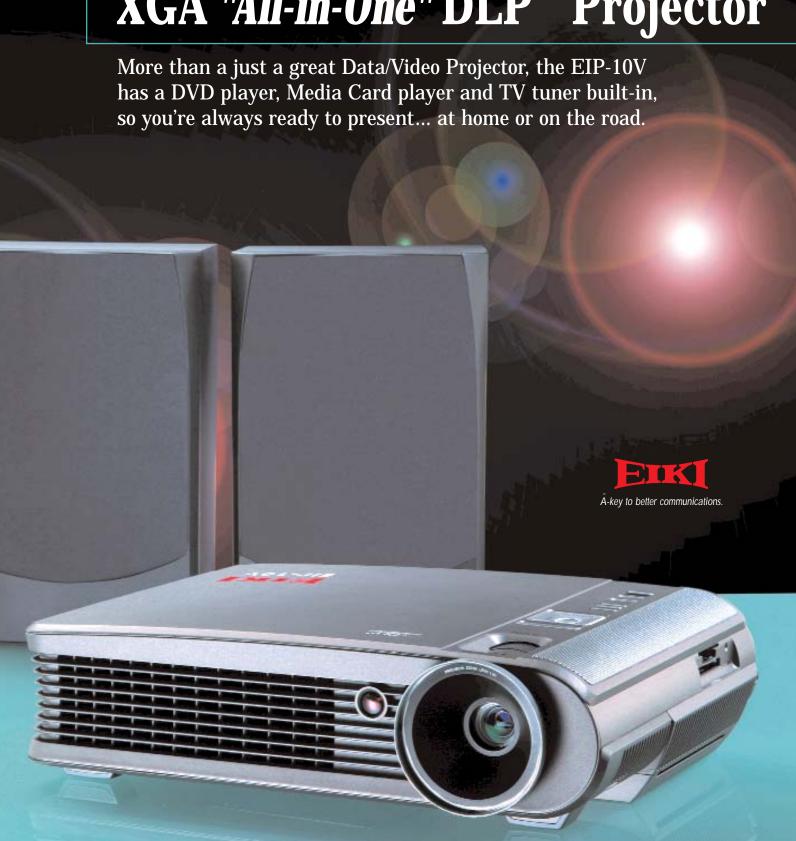



MENU


The EIKI EIP-10V "All-In-One" Data/Video Projector.

More than just a great Data/Video Projector, the EIKI EIP-10V is a Self-Contained Presentation System.

Lightweight and compact, it delivers a bright, high contrast XGA computer or progressive scan video DLPTM image. And a DVD player, Media Card player and TV tuner are all built in, so there's no need to search for the peripheral you need to project a DVD, DigiCam Movie or Digital Photo files, or TV program: everything you need is at your fingertips.

The EIP-10V is easy-to-use. The projector locates each new source you connect or start automatically, and configures itself to play. What's more, control for all of the devices is on one convenient wireless remote. And the entire system fits in the supplied carry case, so you can take it anywhere: office, school, home, church... wherever you'd like to project.

The EIKI EIP-10V "All-in-One" gets it all together. It has almost everything necessary for a powerful presentation: just add your computer (if you need it) and you.





Built-in DVD Player



Three Memory Card Slots



Built-In TV Tuner



Optional Wireless Speakers



KEY FEATURES: Model EIP-10V

- Self-Contained Multi-Source Projection System: just add your computer.
- Includes XGA Projector, DVD Player, Media Card Player, TV Tuner.
- Weighs about 10.5 lbs! Combines all these devices in one compact package.
- DLP™ projector delivers 1800 ANSI Lumens and a 2200:1 contrast ratio.
- True XGA resolution. SXGA, XGA, SVGA, and VGA compatible.
- Quiet operation: operating noise about 32 dBA (typical).
- Smart data compression/expansion, and video scaling.
- Precision optical engine and manual zoom and focus lens.
- Preset image offset. Vertical digital keystone correction. 32X digital zoom.
- Accepts Composite, S, and Component Video (i/p) in all major standards.
- Displays both Normal 4:3 and Widescreen 16:9 ratio video formats.
- Supports HDTV at 1080i, 1035i & 720p. Supports SD at 480i/p & 575i/p.
- Built-in DVD player with "Intelligent Progressive Scan" for a film-like image.
- Media Card Player supports most Movie, Photo and Audio media.
- 5.1 Channel Audio Output. Wireless Audio Output (speakers optional).
- Wireless remote controls all included devices. Carry case included.
- 3 Year* System Warranty!



Specifications: Model EIP-10V

DATA/VIDEO PROJECTOR			
Screen Brightness			
Illumination Uniformity			
Size of Color Palette			
Contrast Ratio			
Horizontal Resolution			
Projection Lamp	P-VIP		
Estimated Lamp Life	rs Eco		
Imaging System			
Screen Pixels			
Total Pixels	(/68)		
Lens Type Manual Zoom and Lens Specs Speed: f:2.8~3.1; FL: 1.02~1.18 in. (25.8~30.0)	rocus		
Lens Ratios	. 9 1.1		
Image Diagonal			
Image Width			
Throw Distance			
Front Elevation / Maximum Tilt up to 15° up / +	/- 45°		
Anti Keystone Fixed Image Offset, Ratio (Top:Bottom) est. 10:0 (1	00%)		
Vertical Keystone Correction Digital: up to 12° up or	down		
Scanning Frequency Auto: H Sync. 15~82kHz; V Sync. 50-			
Dot Clock	MHz		
Image Orientation Normal, Reversed, In	verted		
Remote Control Wireless (Infra Rec	1) x 1		
Computer Native Resolution	XGA)		
Computer: Compatibility SXGA, XGA, SVGA, Computer: Formats 1280x1024, 1024x768, 800x600, 640	V G A		
Computer: Higher Resolutions	roccod		
Computer: Lower Resolution Displayed Smart Exp	anded		
Computer Input: Data	15 x 1		
Audio	eo x 1		
Computer Output (Monitor) HD15 x 1 Video Color Sy			
NTSC / PAL / SECAM / NTSC 4.43 / PAL-	M&N		
Video Resolutions	1080i		
Video Formats Supported Normal 4:3 and Wide Screen			
Video: Image Sizing	ıology		
Video Input - 1. Composite	1 (Y)		
2. S-Video			
3. Component			
Audio	L&K)		

INCLUDED SOURCE DEVICES

DVD Player:	. Slot-in type. Progressive Scan with 2-3 Pulldown Support
Supports I	DVD, VCD, CD, Interactive VCD, S-VCD, MP3, JPEG file
	3 Bays: CF/SM/MD/MS/SD/MMC media
Play	ys Photo (JPG) Movie (MPEG1 & 2) and Music (MP3) files
TV Tuner:	"F" Terminal x 1
	NTSC Channels 1~125

OVERALL SYSTEM


Internal Audio:		Mono: 2 Watt
	Speaker	1.5 in. (4.0 cm) x 1
Audio Output (Wi	íreď)	Stereo – MiniStereo x 1
•	5.1 Channel	MiniStereo x 3
Operating Noise		
Cabinet Size	(HxWxD)	3.6 x 14.7 x 11.4 in. (92.0x37.4x29.0 cm.)
Packaged Size	(HxWxD)	12.0 x 19.5 x 16.0 in. (30.5x49.5x40.6 cm)
Packaged Weight .		26.5 lb (12 kg)
		100-240V AC, 50/60Hz
Power Consumption	on / Heat	Normal 330 W / 1126 BTU/hr (284 Kcal/hr)
Power Cord		6' (2M) Type 3, Detachable
Compliance		FCC Class B, cULus Listed
Security Facilities .		Kensington® Security Slot
Operating Tempera	ature	41~95°F (5~35°C)
User Maintenance		Replace Lamp
Warranty: System .		Yr. / 6000 Hr. *(Parts & Labor to Correct Defects)
Warranty: Lamp		90 Days (Failed Lamp Replaced Pro-Rata
		* Whichever occurs first

OPTIONAL WIRELESS STEREO SOUND SYSTEM

Built-in Wireless Audio Transmitter	Frequency: 2400 MHz band
	Channels: 8; Spacing: 7 MHz (min)
Optional Wireless Amplified Speakers	25W x 2
Size (each):	10.6x6.7x7.1 in (27x17x18 cm)
Weight - pair:	18.3 lb (8.3 kg)
Packaged Size (pair):	. 14x19x10 in (35.5x48.3x25.4 cm)
Packaged Weight (pair):	21.2 lb (9.6 kg)
Power Requirements:	100-240V AC, 50/60Hz
Power Consumption:	100 W

Specifications subject to change without notice. ©2004 EIKI International, Inc. Printed in the USA. 6/01/04





Here's everything you need to connect and project.



INCLUDED ACCESSORIES:

Quick Start Guide. Owner's Manual. North America 3-prong grounded and polarized AC Power Cord & 2-prong polarized Adapter with ground wire. European 2-prong AC Power Cord. Lens Cover & Retainer. VGA-type Computer In/Out Cable (HD15 ~ HD15). MAC Adapter. Computer Audio In/Out Cable (Stereo Mini~Stereo Mini). Audio Mono~Stereo "Y" Cable (RCA x 1 ~ RCA x 2). Wireless Remote Control with 2 AAA Batteries. Padded Carry Bag with shoulder strap.

OPTIONAL ACCESSORIES:

Replacement Lamp. Wireless Speakers. Ceiling Mount. Ceiling Post and Plate.

One wireless remote controls all functions.

Eiki International, Inc.

30251 Esperanza., Rancho Santa Margarita, CA 92688
Tel: 800-242-3454; Fax: 800-457-3454, E-mail: usa@eiki.com
In Canada, 310 First St.- Unit 2, P.O. Box 156, Midland, ON L4R 4K8
Phone: 800-563-3454, Fax: 800-567-4069 E-mail: canada@eiki.com

Fax-on-Demand: (Toll Free) 877-345-4329 Visit our World Wide Web site: http://www.eiki.com