

EIP-5000

XGA Conference DLP® Projector 5200 ANSI Lumens

- ▼ 5200 ANSI Lumens bright, at 90% uniformity, and a 1200:1 contrast ratio.
- ▼ XGA resolution. UXGA, SXGA+, SXGA, SVGA, VGA & MAC compatible.
- ▼ DLP® imaging technology delivers a “seamless” high contrast image.
- ▼ Power Zoom and Focus Lens. Optional Wideangle and Telephoto lenses.
- ▼ Horizontal & Vertical Lens Shift. H, V & Geometric Keystone Correction.
- ▼ Dual Lamp System provides redundancy and permits 4 brightness levels.
- ▼ Wireless/wired remote. Computer mouse control. 8-power digital zoom.
- ▼ RS-232 System and Network Control Compatible: Built in DB9 and RJ45.
- ▼ Smart data compression/expansion, and video scaling. sRGB Compatibility.
- ▼ Displays both Regular 4:3 and Widescreen 16:9 ratio video formats.
- ▼ Converts Interlace video to Progressive scan. 2-3 Pulldown Support.
- ▼ Accepts Analog and Digital (DVI w/HDCP) Video input signals.
- ▼ Power Management, Keylock Security, and Custom Warmup Screen options.
- ▼ Unique Projector Stack Control and VideoWall Signal Division features.
- ▼ 3 Year* Projector Warranty!




*Get the film-like imaging of DLP® technology
in a projector with conference room brightness
and built-in network control.*

EIKI
Projectors... and more!

EIP-5000

5200 ANSI Lumens

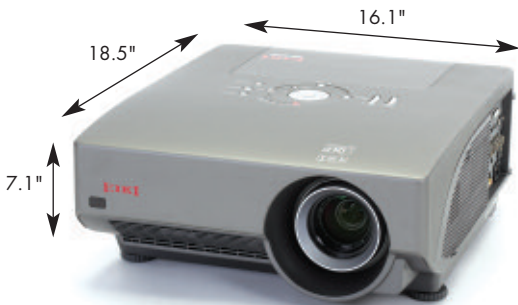

Hg Lamp Contains Mercury. Do not put in trash. Dispose-of-as Hazardous Waste, according to the laws in your jurisdiction.



INCLUDED ACCESSORIES:

Printed Quick Setup Guide and Owner's Manual. Quick Setup Guide, Owner's Manual and CAD Drawings on CD ROM. 12 ft (3.6 M) AC Power Cord. Lens Cover. 9.8 ft (3 M) VGA-type Computer Input Cable. Wireless/wired Remote with Mouse Control & 2 x AA batteries. Remote Mouse Receiver on 5.25 ft (1.6M) USB-A cable.

OPTIONAL ACCESSORIES:

Replacement Lamps. Soft Carry Bag with Wheels and Telescoping Handle. ATA-Style Shipping Case with Wheels and Telescoping Handle. Wideangle and Telephoto Lenses. Ceiling Mount. Ceiling Post and Plate. EZ-250 Local Control.

EIKI

Projectors... and more!

Specifications subject to change without notice.
©2007 EIKI International, Inc. Printed in the USA. 07/15/07

SPECIFICATIONS: EIP-5000

Screen Brightness	up to 5200 ANSI Lumens
Illumination Uniformity	90%
Size of Color Palette	16.7 Million
Contrast Ratio	1200:1
Horizontal Resolution	750 TV Lines (HDTV)
Projection Lamp	260 Watt UHP x 2
Estimated Lamp Life	up to 2500 Hours of Use
Imaging System	0.7" DDR DLP® Single DMD™
Color System	4-segment, 3X speed color wheel
Screen Pixels	786,432 (1024 x 768) in stripe configuration
Lens Type	Power Zoom and Focus
Lens Specs	Speed: f:1.8~2.0; Fl: 1.01~1.23 in. (25.6~31.3 mm)
Lens Ratios	Zoom Max:Min: 1.22:1; Throw:Width: 1.8~2.2:1
Image Diagonal	40~500 in. (102~1270 cm)
Image Width	2.5~33.3 ft. (0.81~10.16 m)
Throw Distance	4.8~44 ft. (1.5~13.4 m)
Front Elevation/Maximum Pitch	up to 9° up
Vertical Anti Keystone	Power Lens Shift (Top:Bottom) 10:0~1:1
Horizontal Anti Keystone	Power Lens Shift (L:R-R:L) 6.5:3.5~3.5:6.5
Vertical Keystone Correction	Digital: up-to 30° up or down
Horizontal Keystone Correction	Digital: up-to 30° left or right
Geometric Keystone Correction	Digital
Scanning Frequency	Auto: H Sync. 15-126 kHz; V Sync. 43-200 Hz
Dot Clock	12~230 MHz
Image Orientation	Normal, Reversed, Inverted
Local Control/Power Management	Full Shut-Off/Auto Shut-Off
Remote Projector & Mouse Control	Wireless/Wired x 1
Computer Mouse Control	via External IR Receiver on USB-A cable
Wired Remote Port	MiniStereo x 1
RS-232 Port	DB9 x 1
LAN Port	RJ45 x 1
Computer Native Resolution	1024 x 768 (XGA)
Computer: Compatibility	UXGA, SXGA+, SXGA, WXGA, XGA, SVGA, VGA, MAC & Workstation: SUN, SGI
Computer: Formats	1600 x 1200 through 640 x 480
Computer: Image Sizing	Normal, or Smart Compressed or Expanded
Video: Color Systems	NTSC/PAL/SECAM/NTSC 4.43/PAL-M/N
Video: Aspect Ratios Supported	4:3 and 16:9
Video: Image Resizing	Video Scaling Technology
Video: Resolutions Supported	
SDTV (Composite, S-Video, Component)	480i, 540p, 576i
EDTV (DVI w/HDCP)	480p, 576p
HDTV (DVI w/HDCP)	720p (50/60), 1035i (50/60), 1080i (50/60)
Signal Inputs:	
1. Computer: HD15 x 1 Analog RGB	
plus Audio: Stereo: MiniStereo x 1 (L & R)	
either Computer: BNC x 5 (RGBHV)	
2b. or Video: BNC x 5 (RGBHV)	
or BNC x 3 (Composite/Component: Y,Pb/Cb,Pr/Cr)	
plus, Audio: Stereo: MiniStereo x 1 (L & R) (shared with input 3)	
3a. either Computer - Digital RGB: DVI-D x 1	
3b. or Video - Digital HDCP: (same) DVI-D x 1	
plus, Audio: Stereo: MiniStereo x 1 (L & R) (shared with input 2)	
4. Video : Composite - RCA x 1	
plus, Audio: Stereo: MiniStereo x 1 (L & R) (shared with input 5)	
5. Video : S-Video - S-Video x 1	
plus, Audio: Stereo: MiniStereo x 1 (L & R) (shared with input 4)	
Signal Outputs:	
Data/Video Monitor	HD15 x 1 on Input 1 (shared: Input 1 & 2)
Audio: Line	Stereo: MiniStereo x 1 (L & R) (follows video)
Audio: Amplifier	Stereo: 3 Watts
Audio: Built In Speakers	Stereo: 1.3 in. (3.3 cm) diameter (round) x 2
Operating Noise	as low as 35 dBA
Cabinet Size (HxWxD)	7.1 x 16.1 x 18.5 in. (180 x 410 x 471 mm)
Overall Size (HxWxD)	7.6 x 16.2 x 18.5 in. (193 x 412 x 470 mm)
Weight	32.7 lb. (14.83 kg)
Packaged Size (HxWxD)	15.4 x 22 x 24.4 in. (390 x 560 x 620 mm)
Packaged Weight	46.3 lb. (21 kg)
Power Requirements	100-240V AC, 50/60Hz
Power Consumption:	up to 650 W
Heat:	up to 2,218 BTU/hr (559 Kcal/hr)
Power Cord	11.8' (3.6M) Type 3, Detachable
Safety Compliance	UL/cUL
Security Facilities	Kensington® Security Slot
Operating Temperature	41~104°F (5~40°C)
User Maintenance	Clean Air Vents/Covers, Replace Lamps
Warranty: (to the original end-use customer)	
Projector:	3 Years/6000 Hour Use*(Parts & Labor to Correct Defects)
Lamp:	90 Days (Failed Lamp Replaced Pro-Rata)
	* Whichever occurs first

Talk to your EIKI Dealer... the "pro" in projectors.



Eiki International, Inc.

30251 Esperanza, Rancho Santa Margarita, CA 92688-2130
Tel: 800-242-3454; Fax: 800-457-3454, E-mail: usa@eiki.com
In Canada, 310 First St.-Unit 2, P.O. Box 156, Midland, ON L4R 4K8
Phone: 800-563-3454, Fax: 800-567-4069 E-mail: canada@eiki.com

<http://www.eiki.com>