

# EIP-X350

## XGA DLP® Projector


### 3500 ANSI Lumens



*Compact, lightweight, and bright, this economical data/video projector is a low cost solution for classrooms, training rooms, and meeting rooms.*

- ▼ 3500 ANSI Lumens, 80% uniformity, and 2000:1 contrast ratio.
- ▼ True XGA resolution. SXGA+ through VGA and MAC compatible.
- ▼ Smart data compression/expansion, and video scaling.
- ▼ DVI input supports digital data, plus digital video w/HDCP.
- ▼ Accepts Composite, S, and Component Video, both 4:3 and 16:9.
- ▼ Compatible with HD input resolution up to 1080i.
- ▼ Convenient manual zoom (1.2X) and focus lens.
- ▼ Built in image offset. Vertical digital keystone correction.
- ▼ Power management and Eco mode help prolong lamp life.
- ▼ Selectable menu position and timeout. Auto input selection.
- ▼ Wireless remote control with laser pointer. Carrying Case included.
- ▼ 3 Year\* Projector Warranty!

**EIKI**  
Projectors... and more!

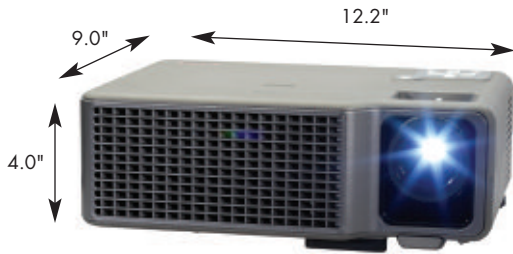


Input Panel



Top-Mounted Control



Wireless Remote Control



**INCLUDED ACCESSORIES:**

Quick Start Guide. Owner's Manual on CD. AC Power Cord. Lens Cover. VGA-type Computer Input Cable (HD15~HD15). Composite Video Cable. S-Video Cable. Audio Cable. Wireless Remote Control & AAA batteries x 2. Carrying Case.

**OPTIONAL ACCESSORIES:**

Replacement Lamp. VGA~Component Video Input Cable (HD15~3-RCA). Mouse Cable (USB-A~USB-B) RS-232 Control Cable (DB9~6-Pin DIN). Ceiling Mount. Ceiling Post and Plate. EZ-250 Local Control. NPC-1 Network Control.

## SPECIFICATIONS: EIP-X350

Brightness	up to 3500 ANSI Lumens
Illumination Uniformity	80%
Size of Color Palette	16.7 Million
Contrast Ratio	up to 2000:1
Projection Lamp	300 Watt UHP
Estimated Lamp Life	up to 2000 Hours of Use
Imaging System	0.7 in. DMD
Screen Pixels	1024 x 768 in stripe configuration
Total Pixels	786,432 ((1024 x 768) x 1)
Lens Type	Manual Zoom and Focus
Lens Specs	Speed: f:2.3~2.75; FL:0.929~1.112 in. (23.6~28.25 mm)
Lens Ratios	Zoom Max:Min: 1.2:1; Throw:Width: 1.64~1.97:1
Image Diagonal	30~300 in. (76.2~762 cm)
Image Width	2.07~18.52 ft. (0.63~5.7 m)
Throw Distance (tele~wide)	3.94~32.8 ft. (1.2~10 m)
Front Elevation	up to 8°Up
Anti Keystone	image starts 15.5% of image height above lens center
Vertical Keystone Correction	Digital: up to 15° up or down
Scanning Frequency	Auto: H Sync. 31-79kHz; V Sync. 50-85Hz
Dot Clock	108 MHz
Image Orientation	Normal, Reversed, Inverted
Local Control/Power Management	Full Function/Auto Shutdown
Remote Control w/Mouse & Laser Pointer	Wireless (Infra red) x 1
RS-232 Control Port	6-Pin DIN x 1
Mouse (Page Up/Down) & Firmware Update Port	USB-B x 1
TRIGGER terminal	DC 12V output
Computer Native Resolution	1024 x 768 (XGA)
Computer: Compatibility	SXGA+, SXGA, XGA, SVGA & VGA & MAC
Computer: Formats	1400 x 1050 through 640 x 480
Computer: Higher Resolutions	Displayed panned or Smart Compressed
Computer: Lower Resolutions	Displayed normal or Smart Expanded
Video Compatibility	NTSC/PAL/SECAM/NTSC 4.43/PAL-M&N
Video HD Compatibility	480i/p, 540p, 576i/p, 720p, 1035i, 1080i
Formats Supported	Normal 4:3 and Wide Screen 16:9
Video: Image Sizing	Video Scaling Technology
Signal Inputs	
Digital Computer/Digital Video w/HDCP	DVI-D x 1
Analog Computer (Component Video with optional adapter)	HD15 x 1
Component Video	RCA x 3
S-Video	S-Video x 1
Composite Video	RCA x 1
Audio	MiniStereo x 1
Signal Outputs	
Analog Computer	HD15 x 1
Audio	MiniStereo x 1
Sound System – Amplifier:	2 Watt (Mono)
Sound System – Speaker:	1.1 in. (2.8cm) x 1
Fan Noise	as low as 32 dBA
Cabinet Size (HxWxD)	4.0 x 12.2 x 9.0 in. (102 x 309 x 229 mm)
Weight	7 lb. (3.2 kg)
Packaged Size (HxWxD)	14.4 x 14.6 x 9.3 in (365 x 370 x 235 mm)
Packaged Weight	12.97 lb. (5.89 Kg)
Power Requirements	100-240V AC, 50/60Hz
Power Consumption	up to 380 W
Heat	up to 1297 BTU (327 KC)
Power Cord	6' (1.8 M) Type 3, Detachable
Electrical Safety Compliance	UL/cUL
Electromagnetic Compatibility	FCC Class B, CE Mark
Security Facilities	Kensington® Security Slot
Operating Temperature	32~104°F (0~40°C)
User Maintenance	Replace Lamp
UPC	4571194671629
Warranty: (to the original end-use customer)	
Projector:	3 Years/6000 Hour Use*(Parts & Labor to Correct Defects)
Lamp:	90 Days (Failed Lamp Replaced Pro-Rata * Whichever occurs first

Talk to your EIKI Dealer... the "pro" in projectors.

