



LC-SD10

1250 ANSI Lumens!

Remarkably small and light, and amazingly bright, this micro portable is a real jewel.

- Weighs 4.6 lb. (2.1 kg)! Footprint smaller than a sheet of paper.
- True SVGA resolution. XGA, SVGA, VGA and MAC compatible.
- 1250 ANSI Lumens bright, at 85%+ uniformity, and a 300:1 contrast ratio.
- Quiet, unobtrusive operation (only 32 dBA in Eco mode)
- 3 panel LCD imaging delivers rich, color saturated visuals.




- Smart data compression / expansion, and video scaling fills the screen.
- Anti Keystone image offset, plus Digital Keystone Correction.
- Wireless remote control. 4-power Digital Zoom, Freeze, and No Show.
- Accepts Composite, S-Video, and DVD & HDTV Component Video Input
- Displays both Regular 4:3 and Widescreen 16:9 aspect ratio video formats.
- 3 Year* Warranty!

EIKI
PROJECTORS

EIKI Means Projectors ... and more!

LC-SD10

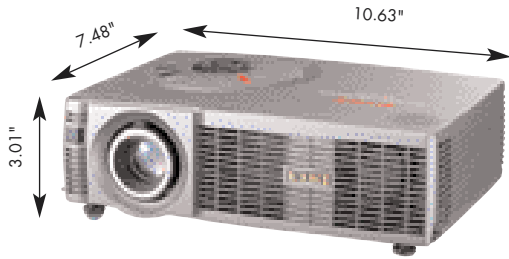

Wireless remotes control both projector and mouse. blah, blah, blah. And,.....



Lamp Contains Mercury. Do not put in trash. Dispose-of-as Hazardous Waste, according to Local, State or Federal Laws.

INCLUDED ACCESSORIES:

Owner's Manual. AC Power Cord. Lens Cover with strap. HD15 (VGA-type) Computer Input Cable. Wireless Remote Projector Control With Batteries (AAA x 2). Soft Carry Bag. Presentation Kit (Remote Control with USB remote receiver).

OPTIONAL ACCESSORIES:


Replacement Lamp. HD15~Component Video (Y, Pb/Cb, Pr/Cr) Input Adapter. MAC Adapter. Wireless Remote Control with Mouse and Laser Pointer & Batteries (AA x 2). Mouse cable for PC PS/2 port. Cable for mouse and RS-232 communications for 9-pin PC Serial port. Mouse cable for MAC ADB port. 33' (10m) Mouse Extension Cable for Control Port. Selection of Bags and Cases. Ceiling Mount. Ceiling Post and Plate.



SPECIFICATIONS: LC-SD10

Screen Brightness	1,250 ANSI Lumens (900 in Eco mode)
Illumination Uniformity	85%+
Size of Color Palette	16.7 Million
Contrast Ratio	300:1 (in Auto lamp mode) (Full ON/OFF)
Horizontal Resolution	400 TV Lines (S-Video)
Projection Lamp	160 Watt UHP
Estimated Lamp Life	2,000 Hours (2,500 Hours in Eco mode)
Imaging System	0.55" PolySilicon active matrix TFT Panels x 3
Screen Pixels	800 x 600 in stripe configuration
Total Pixels	1,440,000 ((800 x 600) x 3))
Lens Type	Manual Zoom and Focus
Lens Specs	Speed: f:1.6~1.8; FL: .72~.86 in. (18.3~21.9 mm)
Lens Ratios	Zoom Max:Min: 1.2:1; Throw:Width: 1.57~1.87
Image Diagonal	34~200 in. (86.4~508 cm)
Image Width	2.3~13.3 ft. (0.7~4.07 m)
Throw Distance	4.3~25.0 ft. (1.3~7.6 m)
Maximum Pitch	8° up / +/- 20° (can be inverted)
Anti Keystone	Optical: Fixed Offset (Top:Bottom) Ratio 9:1
Keystone Correction	Digital: Variable Adjustment +20° ~ -20°
Scanning Frequency	Auto: H Sync. 15-80kHz; V Sync. 50-100Hz
Dot Clock	100 MHz
Image Orientation	Normal, Reversed, Inverted
Local Control / Power Management	Full Function/Auto Shut-Off
Remote Projector Control	Infra Red x 1
Control Ports	USB x 1 (Mouse), Mini DIN 8 Pin x 1 Mouse & RS-232)
Computer Native Resolution	800 x 600 (SVGA)
Computer: Compatibility	XGA, SVGA, VGA & MAC
Computer: Formats	1024x768, 800x600, 640x480
Computer: Image Sizing	Normal or Smart Compressed or Expanded
Computer: Channels	1
Computer: Inputs	HD15 x 1
Computer: Audio In	Stereo: MiniStereo x 1
Video Compatibility	NTSC/PAL/SECAM/NTSC 4.43/PAL-M/N
Video: Formats Supported	Normal 4:3 and Wide Screen 16:9
Video: Image Sizing	Video Scaling Technology
Video Channels	1
Video In	RCA x 1 (Composite) S-Video x 1 (Component via HD15)
Video: HDTV Standards Supported	1080i, 1035i, 720p, 575i/p, 480i/p
Video: Audio: Input	Stereo: MiniStereo x 1
Audio: Amplifier	Mono: 0.8 Watt RMS
Audio: Built In Speakers	Mono: 1.26 in. (3.2 cm) x 1
Audio: Speaker Output	Mono: MiniStereo x 1
Fan Noise	32 dBA in Eco mode
Cabinet Size** (HxWxD)	3.01 x 10.63 x 7.48 in. (78 x 270 x 190 mm.) (Height does not include foot.)
Weight	4.63 lbs. (2.1 kg)
Packaged Size (HxWxD)	12.3 x 14.8 x 14.0 in. (312 x 374 x 355 mm.)
Packaged Weight	11.7 lbs. (5.3 kg.)
Power Requirements	100-240V AC, 50/60Hz
Power Consumption	244 Watts / 169 Watts in Eco mode
Heat Generation	833 BTU/hr. 577 in Eco (210 KC/hr. 145 in Eco)
Power Cord	10' (3M) Type 3, Detachable
Safety Compliance	UL Listed
Security Facilities	Kensington® Security Slot
Operating Temperature	41~95°F (5~35°C)
User Maintenance	Clean Air Filter, Replace Lamp
Warranty: Projector	3 Yr. / 6000 Hr. *(Parts/Labor to Correct Defects)
Warranty: Lamp	90 Days (Failed Lamp Replaced Pro-Rata) * whichever occurs first

Talk to your EIKI Dealer... the "pro" in projection.



Eiki International, Inc.

30251 Esperanza, Rancho Santa Margarita, CA 92688-2130
Tel: 800-242-3454; Fax: 800-457-3454, E-mail: usa@eiki.com

In Canada, 310 First St.-Unit 2, P.O. Box 156, Midland, ON L4R 4K8
Phone: 800-563-3454, Fax: 800-567-4069 E-mail: canada@eiki.com

Fax-on-Demand: (Toll Free) 877-345-4329 <http://www.eiki.com>

Specifications subject to change without notice.

©2003 EIKI International, Inc. Printed in the USA. 09/15/03