



LC-SD12

1250 ANSI Lumens!

Remarkably small and light, and amazingly bright, this micro portable is a real jewel.



New, Brushed Silver cabinet color.


- Weighs about 4.5 lbs! Footprint 15% smaller than a sheet of paper.
- True SVGA resolution, XGA, SVGA, and VGA compatible.
- 1250 ANSI Lumens bright, at 85% uniformity, and 300:1 contrast ratio.
- Quiet, unobtrusive operation (only 32 dBA in Eco mode).
- 3-Panel LCD imaging delivers rich, color-saturated visuals.
- Smart data compression / expansion, and video scaling fills the screen.
- Anti Keystone image offset, plus Digital Keystone Correction.

- Wireless remote control. 4-power Digital Zoom, Freeze and No Show.
- Accepts Composite, S-Video and DVD & HDTV Component Video Input.
- Displays both Regular 4:3 and Widescreen 16:9 aspect ratio video formats.
- Variable Power Management option. Optional local or remote keylock.
- Custom warm-up screen image option. Factory defaults reset.
- 3 year* Warranty.

EIKI
PROJECTORS

EIKI MEANS PROJECTORS ... AND MORE!

LC-SD12

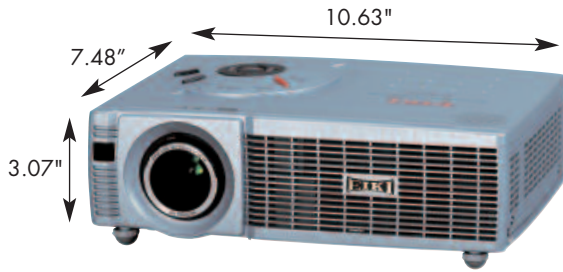

Lamp Contains Mercury.
Do not put in trash. Dispose-of-as
Hazardous Waste, according to
Local, State or Federal Laws.



INCLUDED ACCESSORIES:

Owner's Manual. AC Power Cord. Lens Cover with strap.
HD15 (VGA-type) Computer Input Cable. Wireless Remote
Projector Control With Batteries (AAA x 2). Soft Carry Bag.

OPTIONAL ACCESSORIES:

Replacement Lamp. HD15~Component Video (Y, Pb/Cb, Pr/Cr)
Input Adapter. MAC Adapter. Presentation Kit (IR Wireless
Remote Control and Receiver), 9 Pin Serial cable for RS-232
communications. Ceiling Mount. Ceiling Post and Plate.
Selection of Bags and Cases. EZtrol Local Control. NPC-1
Network Control.

SPECIFICATIONS: LC-SD12

Screen Brightness	1,250 ANSI Lumens / 900 in Eco mode
Illumination Uniformity	85%
Size of Color Palette	16.7 Million
Contrast Ratio	300:1 (in Auto lamp mode) (Full ON/OFF)
Horizontal Resolution	400 TV Lines (S-Video)
Projection Lamp	160 Watt UHP
Estimated Lamp Life	up to 2,500 Hours
Imaging System	0.55" PolySilicon active matrix TFT Panels x 3
Screen Pixels	800 x 600 in stripe configuration
Total Pixels	1,440,000 ((800 x 600) x 3)
Lens Type	Manual Zoom and Focus
Lens Specs	Speed: f:1.6~1.8; FL: 0.72~0.86 in. (18.3~21.9 mm.)
Lens Ratios	Zoom Max:Min: 1.2:1; Throw:Width: 1.57~1.87
Image Diagonal	34~200 in. (86.4~508 cm.)
Image Width	2.3~13.3 ft. (0.7~4.07 m.)
Throw Distance	4.3~21.3 ft. (1.3~6.5 m.)
Front Elevation/Maximum Tilt	8° up / +/- 20° (can be inverted)
Anti Keystone	Optical: Fixed Offset, (Top:Bottom) Ratio 9:1
Keystone Correction	Digital, Variable Adjustment +30° ~-30°
Scanning Frequency	Auto: H Sync. 15-80kHz; V Sync. 50-100Hz
Dot Clock	100 MHz
Image Orientation	Normal, Reversed, Inverted
Local Control/Power Management	Full Function/Auto Shut-Off
Remote Projector Control	Wireless Infra Red x 1
Slideshow Page-Up / Page-Down Port	USB - B x 1
Service Port (RS-232)	Mini DIN 8 Pin x 1
Computer Native Resolution	800 x 600 (SVGA)
Computer: Compatibility	XGA, SVGA, VGA & MAC
Computer: Formats	1024x768, 800x600, 640x480
Computer: Image Sizing	Normal or Smart Compressed or Expanded
Computer: Channels	1
Computer: Inputs	HD15 x 1
Computer: Audio In	Stereo: MiniStereo x 1
Video Compatibility	NTSC/PAL/SECAM/NTSC 4.43/PAL-M&N
Video: Formats Supported	Normal 4:3 and Wide Screen 16:9
Video: Image Sizing	Video Scaling Technology
Video: Channels	1
Video: In	RCA x 1 (Composite) S-Video x 1 (Component via HD15)
Video: HDTV Standards Supported	1080i, 1035i, 720p, 575i/p, 480i/p
Video: Audio Input	Stereo: MiniStereo x 1
Audio: Amplifier	Mono: 0.8 Watts RMS
Audio: Built In Speakers	Mono: 1.26 in. (3.2 cm.) x 1
Fan Noise	37 dBA /32 dBA (in Eco mode)
Cabinet Size (HxWxD)	3.07x10.63x7.48 in. (78x270x190 mm.)
	(Height does not include foot)
Weight	4.63 lbs. (2.1 kg.)
Packaged Size (HxWxD)	12.3 x 14.8 x 14.0 in. (312 x 374 x 355 mm.)
Packaged Weight	11.7 lbs. (5.3 kg.)
Power Requirements	100-240V AC, 50/60Hz
Power Consumption	244 Watts / 169 Watts in Eco mode
Heat Generation	833 BTU/hr 577 in Eco mode (210 KC/hr. 145 in Eco)
Power Cord	10' (3M) Type 3, Detachable
Safety Compliance	UL Listed
Security Facilities	Kensington® Security Slot
Operating Temperature	41~95°F (5~35°C)
User Maintenance	Clean Air Filter, Replace Lamp
Warranty: Projector	3 Yr. / 6000 Hr. *(Parts/Labor to Correct Defects)
Warranty: Lamp	90 Days (Failed Lamp Replaced Pro-Rata)
	* whichever occurs first

Talk to your EIKI Dealer... the "pro" in projection.



Specifications subject to change without notice.

©2005 EIKI International, Inc. Printed in the USA. 04/01/05

Eiki International, Inc.

30251 Esperanza, Rancho Santa Margarita, CA 92688-2130
Tel: 800-242-3454; Fax: 800-457-3454, E-mail: usa@eiki.com

In Canada, 310 First St.-Unit 2, P.O. Box 156, Midland, ON L4R 4K8
Phone: 800-563-3454, Fax: 800-567-4069 E-mail: canada@eiki.com

<http://www.eiki.com>