

2,200 & 2,600 ANSI Lumens • XGA • 3LCD

LC-XBL21W • LC-XBL26W

XGA "Brilliant" Series Projectors



A low-cost, featured-rich classroom projectors with a full complement of basic features including network monitoring and control.



Key Features:

- △ 2,200 & 2,600 ANSI lumens bright with 85% uniformity and a 500:1 contrast ratio.
- △ Native XGA resolution. Compatible with inputs up-to UXGA and WUXGA.
- △ Supports analog video input in all color standards up-to 1080i.
- △ 3 panel LCD imaging delivers a rich, color-saturated picture.
- △ 8-bit color processing yields a 16.7 million color palette.
- △ Convenient midrange (1.2:1) manual zoom and focus lens.
- △ Fixed image offset. Automatic vertical digital keystone correction.
- △ Two Dsub15 computer inputs. Switchable monitor output.
- △ Built-in 1 Watt amplifier and speaker system. Closed Caption decoding.
- △ Built-in wired LAN connection for projector monitoring and control.
- △ Power management and Eco mode help prolong lamp life.
- △ Variable power management option.
- △ Kensington® security slot. Optional local or remote keylock.
- △ Wireless remote control. 50-400% digital zoom.
- △ 3 year projector warranty.



EIKI
Projectors... and more!

LC-XBL21W • LC-XBL26W SPECIFICATIONS:

Brightness LC-XBL21W: up-to 2,200 ANSI Lumens
 LC-XBL26W: up-to 2,600 ANSI Lumens
 Contrast Ratio up-to 500:1
 Illumination Uniformity (corner to center) 85%
 Resolution and Aspect Ratio XGA (1024x768), 4:3
 Color Reproduction 8-bit (16.7 million colors)
 Projection Lamp 215 Watts UHP
 Estimated Lamp Life up-to 6,000 Hours
 Total Pixels 2,359,296 ((1024 x 768) x 3)
 Imaging System 0.55 in (14 mm) LCD Panels x 3
 Scanning Frequency Auto: H: 15-100 kHz; V: 50-100 Hz
 Pixel Clock up-to 140 MHz
 Lens Attached - Manual Zoom and Focus
 Lens Specs Speed: f: 2-2.15; FL: 0.724-0.869 in (18.4-22.1 mm)
 Lens Ratios Zoom Max:Min: 1.2:1; Throw:Width 1.62-1.92:1
 Image Diagonal 40-300 in (102-762 cm)
 Image Width 2.67-20 ft (0.84-6.1 m)
 Throw Distance 4.3-38.7 ft (1.3-11.8 m)
 Projector Elevation Adjustment (legs) up-to 10° Up
 Maximum Pitch up-to 30° Up or Down
 Vertical Lens Shift (% of image height) Fixed: 36% Up
 Vertical Keystone Correction Digital: up-to 30° Up or Down
 Image Orientation Normal, Reversed, Inverted
 Local Control / Power Management Full Function / Auto Shutdown
 RS232 Control Port Dsub9 x 1
 Remote Projector Control Wireless (Infra Red) x 1
 LAN Port RJ45 x 1
 Computer Input in Pixels up-to 1600x1200 (4:3), 1920x1200 (16:10)
 Analog 4x3 Inputs UXGA, SXGA+, SXGA, XGA, SVGA, VGA, MAC
 Analog Wide Inputs WUXGA, WSXGA+, WXGA+, WXGA
 Video Formats NTSC / PAL / SECAM / NTSC 4.43 / PAL-M&N
 Video Input Analog 480i/p, 575i/p, 720p, 1035i, 1080i
 Image Signal Resizing Smart Scaling Technology



Image Signal Inputs
 1. Computer / Component Dsub15 x 1
 Component Video (with optional adapter), 3RCA
 S-Video (with included adapter)
 2. Computer / Component Dsub15 x 1
 Switchable Monitor Output
 3. Composite Video RCA x 1
 Audio Signal Inputs
 For Computer signals Stereo: MiniStereo x 1
 For Video signals Stereo: RCA x 2
 Outputs
 Computer Monitor (by switchable input port) Dsub15 x 1
 Audio Output Variable, Stereo: MiniStereo x 1
 Amplifier Stereo: 1 Watt
 Speaker 1.1 in (2.8 cm) x 1 (Mono)
 Fan Noise as low as 29 dBA
 Cabinet Size (HxWxD) 3.4 x 13.2 x 9.7 in (8.5 x 33.5 x 24.7 cm)
 (excluding legs)
 Weight 5.7 lb (2.6 kg)
 Packaged Size (HxWxD) 8.4 x 16.9 x 16.2 in (21.3 x 42.9 x 41.1 cm)
 Packaged Weight 10.6 lb (4.8 kg)
 Power Requirements 100-240V AC, 50/60 Hz
 Power Consumption LC-XBL21W: 0.4 W in Eco Standby mode, up-to 261 W
 LC-XBL26W: 0.4 W in Eco Standby mode, up-to 284 W
 Heat LC-XBL21W: 1.4 BTU/hr in Eco Standby mode, up-to 891 BTU/hr
 LC-XBL26W: 1.4 BTU/hr in Eco Standby mode, up-to 969 BTU/hr
 Power Cord 10 ft (3 m) Type C13, Detachable
 Electrical Safety Compliance IEC / UL / cUL
 Electromagnetic Compatibility FCC Class B, CE Mark
 Security Facilities Kensington® Security Slot
 Operating Temperature 41-95°F (5-35°C)
 User Maintenance Clean Air Filter, Change Lamp
 UPC LC-XBL21W: 4571194674323
 LC-XBL26W: 4571194674361
 Limited Warranty: to the original end-use customer only
 Projector: 3 Years
 Lamp: 6 months ownership / 500 hours use (whichever occurs first)

EIKI® is a registered trademark of Eiki International, Inc. Kensington® is a registered trademark of ACCO Brands Corporation.

A Bright Entry-Level Projector.
Longer Lamp Life: Up-to 6,000 Hours.
Wired Network Connection/Closed Caption Decoding.



Just connect, and project.

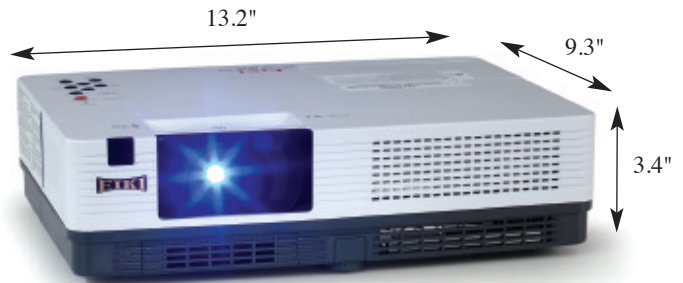

LC-XBL21 & LC-XBL26 • XGA "Brilliant Series projector

INCLUDED ACCESSORIES:

Quick Start Guide, Owner's Manual on CD-ROM, Network Software on CD-ROM, Power Cord, Lens Cover, S-Video Input Cable (Dsub15 to S-Video), VGA Computer Input Cable (Dsub15 to Dsub15), Wireless Remote Control (with 2 AAA Batteries).

OPTIONAL ACCESSORIES:

Soft Carry Bag, Replacement Lamp, Component Video Input Cable (Dsub15 to 3RCA), Ceiling Mount, Ceiling Post & Plate.

Specifications subject to change without notice. ©2012 Eiki International, Inc. Printed in the USA. 09/01/12



Eiki International, Inc.
 30251 Esperanza Δ Rancho Santa Margarita, CA 92688-2130
 Phone: 800-242-3454 Δ Fax: 800-457-3454 Δ E-mail: usa@eiki.com
 In Canada: 310 First St.- Unit 2, P.O. Box 156 Δ Midland, ON L4R 4K8
 Phone: 800-563-3454 Δ Fax: 800-567-4069 Δ E-mail: canada@eiki.com