

EIKI

EIKI

Fixed wide lens for projector

MODEL **AH-55201**

U.S.A.

EIKI International, Inc.
30251 Esperanza
Rancho Santa Margarita
CA 92688-2132
U.S.A.
Tel : 800-242-3454 (949)-457-0200
Fax : 800-457-3454 (949)-457-7878
E-Mail : usa@eiki.com

Canada

EIKI CANADA - Eiki International, Inc.
P.O. Box 156, 310 First St. - Unit 2,
Midland, ON, L4R 4K8, Canada
Tel : 800-563-3454 (705)-527-4084
Fax : 800-567-4069 (705)-527-4087
E-Mail : canada@eiki.com

Deutschland & Österreich

EIKI Deutschland GmbH
Am Frauwald 12
65510 Idstein
Deutschland
Tel : 06126-9371-0
Fax : 06126-9371-14
E-Mail : info@eiki.de

Eastern Europe

EIKI CZECH spol. s.r.o.
Umělecká 15
170 00 Praha 7
Czech Republic
Tel : +42 02 20570024
+42 02 20571413
Fax : +42 02 20571411
E-Mail : easterneurope@eiki.de

China

EIKI (Shanghai) Co.,LTD
1. Dapu Road, Golden Magnolia Plaza
#2109 Shanghai,
200023 China
Tel : 86-21-5396-0088
Fax : 86-21-5396-0318
E-Mail : info@eiki-china.com

Japan & Worldwide

EIKI Industrial Company Limited.
4-12 Banzai-Cho, Kita-Ku, Osaka,
530-0028 Japan
Tel : +81-6-6311-9479
Fax : +81-6-6311-8486

WorldWide Website <http://www.eiki.com>

OWNER'S MANUAL


EIKI INDUSTRIAL CO., LTD.

Printed in China
XXXXXXXXXXXXX
08PXX-CH-NM


English

Picture size and projection distance chart

Side View

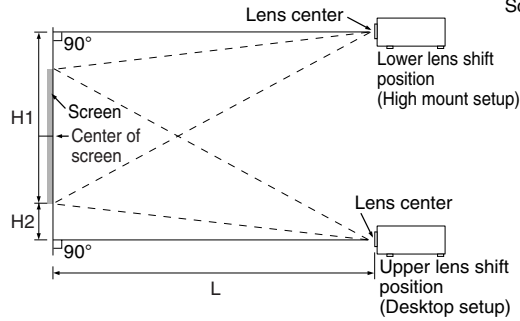

Top View

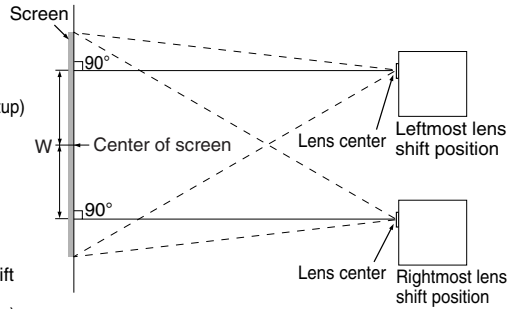

16:10 Signal Input (Normal Mode)

Picture (Screen) size			Projection distance [L]	Distance from the lens center to the bottom of the image [H]		Distance from the lens center to the center of the image [W]
Diag. [X]	Width	Height		Lower [H1]	Upper [H2]	
140" (356 cm)	302 cm (119")	188 cm (74")	2.4 m (8' 0")	-135.7 cm (-53 ²⁷ / ₁₆ ")	-52.8 cm (-20 ²⁹ / ₃₂ ")	±33.2 cm (13 ¹ / ₁₆ ")
120" (305 cm)	258 cm (102")	162 cm (64")	2.1 m (6' 10")	-116.3 cm (-45 ²⁵ / ₃₂ ")	-45.2 cm (-17 ¹³ / ₁₆ ")	±28.4 cm (11 ³ / ₁₆ ")
100" (254 cm)	215 cm (85")	135 cm (53")	1.7 m (5' 9")	-96.9 cm (-38 ⁵ / ₃₂ ")	-37.7 cm (-14 ²⁷ / ₃₂ ")	±23.7 cm (9 ²³ / ₆₄ ")
80" (203 cm)	172 cm (68")	108 cm (42")	1.4 m (4' 7")	-77.5 cm (-30 ¹⁷ / ₃₂ ")	-30.2 cm (-11 ⁷ / ₁₆ ")	±19.0 cm (7 ¹⁵ / ₃₂ ")

The formula for picture size and projection distance
X: Picture size (diag.) (in/cm)
[m/cm]
L (m) = 0.01744X
H1 (cm) = -0.96916X
H2 (cm) = -0.37689X
W (cm) = ±0.23691X
[Feet/inches]
L (ft) = 0.01744X / 0.3048
H1 (in) = -0.96916X / 2.54
H2 (in) = -0.37689X / 2.54
W (in) = ±0.23691X / 2.54

4:3 Signal Input (Normal Mode)

Picture (Screen) size			Projection distance [L]	Distance from the lens center to the bottom of the image [H]		Distance from the lens center to the center of the image [W]
Diag. [X]	Width	Height		Lower [H1]	Upper [H2]	
120" (305 cm)	244 cm (96")	183 cm (72")	2.4 m (7' 9")	-131.7 cm (-51 ³³ / ₁₆ ")	-51.2 cm (-20 ⁹ / ₁₆ ")	±32.2 cm (12 ⁴³ / ₁₆ ")
100" (254 cm)	203 cm (80")	152 cm (60")	2.0 m (6' 6")	-109.7 cm (-43 ³ / ₁₆ ")	-42.7 cm (-16 ⁹ / ₁₆ ")	±26.8 cm (10 ⁹ / ₁₆ ")
80" (203 cm)	163 cm (64")	122 cm (48")	1.6 m (5' 2")	-87.8 cm (-34 ³ / ₁₆ ")	-34.1 cm (-13 ⁷ / ₁₆ ")	±21.5 cm (8 ²⁹ / ₁₆ ")
70" (178 cm)	142 cm (56")	107 cm (42")	1.4 m (4' 6")	-76.8 cm (-30 ¹⁵ / ₁₆ ")	-29.9 cm (-11 ⁴⁹ / ₁₆ ")	±18.8 cm (7 ²⁵ / ₁₆ ")

The formula for picture size and projection distance
X: Picture size (diag.) (in/cm)
[m/cm]
L (m) = 0.01974X
H1 (cm) = -1.09716X
H2 (cm) = -0.42667X
W (cm) = ±0.26823X
[Feet/inches]
L (ft) = 0.01974X / 0.3048
H1 (in) = -1.09716X / 2.54
H2 (in) = -0.42667X / 2.54
W (in) = ±0.26823X / 2.54



Note

- Allow a margin of error in the value in the diagrams above.
- When the distance from the lens center to the bottom of the image [H] is a negative number, this indicates that the bottom of the image is below the lens center.

Adjust the picture size and focus

Refer to "Image Projection" in the projector owner's manual for information on adjusting the focus and picture size.

Handling Precautions

- **Do not disassemble this lens.**
Please refer to your authorized dealer for any maintenance and inspections requiring an open cabinet.
- **Touching any other internal part could cause personal injury or machine malfunction.**
- **Do not touch any glass or protruding part of the lens. This may cause personal injury and reduced performance of the projector.**
- **When maintaining the projector the following points should be noted.**
 - When cleaning the lens be sure to use a commercial air blower or lens cleaning paper (used in cleaning glasses and cameras).
 - The surface of the lens is very delicate. Do not allow hard objects to bump or rub against it.

Supplied Accessories

- Lens cap (front) × 1
- Lens cap (rear) × 1
- Installation manual
- Owner's manual (this manual)

Specifications

Model	AH-55201
Picture size (diagonal)	80" to 140" (16:10)
Focal length	11.6 mm (¹⁵ / ₃₂ ")
F no.	2.5
Throw ratio	1:0.8
Weight	Approx. 2,500 g (5.5 lbs.)
Depth of projector with the lens attached	711 mm (28")