




EIP-25



KEY FEATURES: Model EIP-25

- Weights about 8 lbs! Footprint about the same as a legal notepad!
- 2500 ANSI Lumens, 80% uniformity, and 1800:1 contrast ratio.
- True XGA resolution. SXGA, XGA, SVGA, and VGA compatible.
- Quiet operation: operating noise about 34 dBA.
- Smart data compression / expansion, and video scaling.
- Easy to use and convenient manual zoom and focus lens.
- Preset image offset. Vertical digital keystone correction.
- Accepts Composite, S, and Component Video in all major standards.
- Displays both Normal 4:3 and Widescreen 16:9 ratio video formats.
- Supports HDTV at 1080i, 1035i & 720p. Supports SD at 480i/p & 575i/p.
- Slideshow Page Up/Down on remote control. Factory defaults reset.
- Wireless remote with mouse and Laser pointer. 14X digital zoom.
- 3 Year* Projector Warranty!

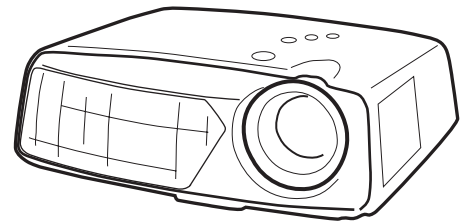

EIP-25

Included Accessories: Quick Start Guide. Owner's Manual. North America 3-prong grounded and polarized AC Power Cord & 2-prong polarized Adapter with ground wire. European 2-prong AC Power Cord. Lens Cover & Retainer. VGA type Computer Input Cable (HD15 ~ HD15). DVI-D ~ DVI-D Computer Input Cable. Computer Audio In/Out Cable (Stereo Mini~Stereo Mini). S-Video cable (Mini Din~Mini Din). Composite Video & Audio Input Cable (RCAX3~RCAX3). Component Video Input Cable (RCAX3~RCAX3). Progressive Scan Input Cable (HD15~RCAX3). Mouse Cable (USB-A~USB-B). Wireless Remote Control With Mouse and Laser Pointer & Batteries (AAA x 2). Padded Carry Bag with Shoulder Strap.

Optional Accessories: Replacement Lamp. Ceiling Mount. Ceiling Post and Plate.

SPECIFICATIONS: Model EIP-25

| | | | |
|--------------------------------|--|----------------------------|--|
| Screen Brightness | 2,500 ANSI Lumens | Computer: Lower Resolution | Displayed Smart Expanded |
| Illumination Uniformity | 80% | Video: Color Systems | NTSC / PAL / SECAM / NTSC 4.43 / PAL-M&N |
| Size of Color Palette | 16.7 Million | Video: Resolutions | 480i/p, 575i, 720p, 1035i, 1080i |
| Contrast Ratio | 1800:1 (Full ON/OFF) | Video: Formats Supported | Normal 4:3 and Wide Screen 16:9 |
| Horizontal Resolution | 800 TV Lines | Video: Image Sizing | Video Scaling Technology |
| Projection Lamp | 250 Watt VIP | Computer In- 1: Analog: | HD15 x1, Audio: Stereo - MiniStereo x1 |
| Estimated Lamp Life | 1500 Hours | 2: Digital: | DVI-D x 1, Audio: Stereo - MiniStereo x1 |
| Imaging System | 0.7" DDR XGA DMD | Video In -1 Composite | RCA x 1 (Y) |
| Screen Pixels | 1024x768 in stripe configuration | 2. S-Video | S-Video x 1 (Y/C) |
| Total Pixels | 786,432 (1024x768) | 3. Component, interlaced | RCA x 3 (YCbCr) |
| Lens Type | Manual Zoom and Focus | 4. Component, progressive | HD15 x 1 (Computer) (YCbCr) |
| Lens Specs | Speed: f:2.4~2.6; FL: .1.102~1.33 in. (28~33.6 mm) | Audio: | Stereo: RCA x 2 (L&R) |
| Lens Ratios | Zoom Max:Min: 1.2:1; Throw:Width: 2.0~2.4:1 | Computer Out - Analog | HD15 x 1, Audio: Stereo - MiniStereo x 1 |
| Image Diagonal | 30~300 in. (76.2~762 cm) | Audio: Amplifier | Stereo: Output: 2.5 Watt RMS x 2 |
| Image Width | 2.0~20 ft. (0.61~6.1 m.) | Audio: Built In Speakers | 1.6 x 1.1 in. (4 x 2.8 cm) x 2 |
| Throw Distance | 4.1~49.2 ft. (1.25~15 m.) | Operating Noise | 34 dBA typical |
| Front Elevation / Maximum Tilt | up to 8° up / +/- 20° | Cabinet Size** (HxWxD) | 4.13 x 12.99 x 10.90 in. (105 x 330 x 277 mm.) |
| Anti Keystone | Fixed Image Offset, Ratio (Top:Bottom) est. 36:-3 (108%) | Weight | 8.15 lbs. (3.7kg) |
| Vertical Keystone Correction | Digital: up to 20° up or down | Packaged Size (H x W x D) | 13.7 x 17.5 x 18.7in. (350 x 444 x 474mm.) |
| Scanning Frequency | Auto: H Sync. 15-100kHz; V Sync. 50-100Hz | Packaged Weight | 17.2 lb (7.8 kg) |
| Dot Clock | 140 MHz | Power Requirements | 100-240V AC, 50/60Hz |
| Image Orientation | Normal, Reversed, Inverted | Power Consumption / Heat | 350 W /1194 BTU/hr (301 Kcal/hr) |
| Local Control | Full Function | Power Cord | 6' (1.8M) Type 3, Detachable |
| Remote Proj & Mouse Ctrl | Wireless (Infra Red) with Laser Pointer x 1 | Safety Compliance | cUL Listed |
| Mouse Port | USB x 1 | Security Facilities | Kensington® Security Slot |
| Computer Native Resolution | 1024x768 (XGA) | Operating Temperature | 41~95°F (3~35°C) |
| Computer: Compatibility | SXGA, XGA, SVGA, VGA | User Maintenance | Replace Lamp |
| Computer: Formats | 1280x1024, 1024x768, 800x600, 640x480 | Warranty: Projector | 3 Yr. / 6000 Hr. *(Parts & Labor to Correct Defects) |
| Computer: Higher Resolutions | Displayed Smart Compressed | Warranty: Lamp | 90 Days (Failed Lamp Replaced Pro-Rata * Whichever occurs first |

The Laser Pointer in the remote control of this projector complies with US FDA 21 CFR

Caution! Laser Radiation – Do not stare into beam. Max. Output: 1mW. Wave Length: 650 +/- 20 nm. Class II Laser Product.

The Lamp in this projector contains trace elements of mercury. As a public service EIKI publishes the following notice.

Lamp contains Mercury. Do not put in trash. Dispose of as Hazardous Waste, according to Local, State or Federal Laws.

Specifications subject to change without notice. ©2004 Eiki International, Inc. Issued January 15, 2004.

Eiki International, Inc., 30251 Esperanza, Rancho Santa Margarita, CA 92688-2132. Tel: 800-242-3454; Fax: 800-457-3454, E-mail: usa@eiki.com

In Canada: 310 First St., Unit 2, P.O. Box 156, Midland, ON L4R 4K8. Tel: 800-563-3454, Fax: 800-567-4069, E-mail: infocanada@eiki.com

Fax-on-Demand: (Toll Free) 877-345-4329 Visit our World Wide Web site: <http://www.eiki.com>