




Projectors... and More!

**EIP-5000**

5,200 ANSI lumens bright with 90% uniformity and a 1200:1 contrast ratio.  
 Native XGA resolution. Compatible with inputs up-to UXGA and WXGA.  
 Supports analog and digital video input in all color standards up-to 1080i.  
 1 chip DLP® imaging technology delivers a “seamless,” high-contrast image.  
 Dual lamp system provides redundancy and permits 4 brightness levels.  
 Power zoom and focus lens. Optional wide-angle and telephoto lenses.  
 Vertical and horizontal power lens shift and digital keystone correction.  
 Includes most professional input configurations, including 5BNC and DVI-D.  
 Built-in 3 Watt amplifier and speaker system. Closed Caption decoding.  
 Built-in wired LAN connection for projector monitoring and control.  
 Power management and Eco mode help prolong lamp life.  
 Kensington® security slot. Optional local or remote keylock.  
 Wireless remote control with mouse control.  
 Auto input selection. Auto setup. Available without lens.  
 3 year projector warranty.

**EIP-5000**  
 5,200 ANSI Lumens / XGA / 1-chip DLP®  
 Conference Series Projector

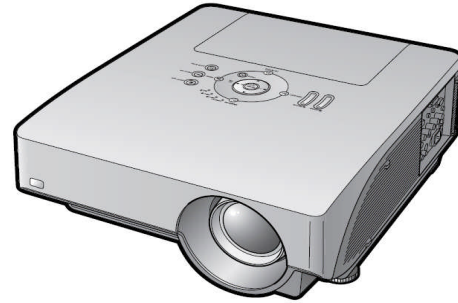

EIP-5000

**Included Accessories:** Printed Quick Start Guide and Owner's Manual, Quick Setup Guide, Owner's Manual and CAD Drawings on CD-ROM, Power Cord, Lens Cover, VGA Computer Input Cable (Dsub15 to Dsub15), Wireless/Wired Remote with Mouse Control (with 2 AA Batteries), USB Cable for Computer Mouse Control.

**Optional Accessories:** Replacement Lamps, Soft Carry Bag with Wheels and Telescoping Handle, ATA-Style Shipping Case with Wheels and Telescoping Handle, Wideangle, Midrange and Telephoto Lenses, Ceiling Mount, Ceiling Post & Plate, EZ-250 Local Control.

**SPECIFICATIONS: Model EIP-5000**

Brightness	up-to 5,200 ANSI Lumens (with standard AH-51401 lens)	Video Input Analog	480i/p, 575i/p, 720p, 1035i, 1080i
Contrast Ratio	up-to 1200:1	Video Input Digital	480p, 575p, 720p, 1035i, 1080i
Illumination Uniformity (corner to center)	90%	Image Signal Inputs	
Resolution and Aspect Ratio	XGA (1024x768), 4:3	1. Analog Computer	Dsub15 x 1
Color Reproduction	8-bit (16.7 million colors)	2. Analog / Digital (RGBHV)	BNC x 5
Projection Lamp	260 Watts UHP x 2	Component Video (Y, Pb/Cb, Pr/Cr), 3BNC	
Estimated Lamp Life	up-to 2,500 Hours	Composite Video, 1BNC	
Imaging System	0.7 in (18 mm) DDR DLP® DMD™ x 1	3. Digital Computer / Digital Video with HDCP	DVI-D x 1
Total Pixels	786,432 ((1024x768) x 1)	4. Composite Video	RCA x 1
Color Wheel	4 segment, (RGBW)	5. S-Video	S-Video x 1
Scanning Frequency	Auto: H: 15-126 kHz; V: 43-200 Hz	Audio Signal Inputs	
Pixel Clock	up-to 230 MHz	For Input 1	Stereo: MiniStereo x 1
Lens	Changeable - Power Zoom and Focus	For Inputs 2 & 3	Stereo: MiniStereo x 1
Lens Specs	Speed: f. 1.81-2.2; FL: 1.01-1.23 in (25.6-31.3 mm)	For Inputs 4 & 5	Stereo: MiniStereo x 1
Lens Ratios	Zoom Max:Min: 1.22:1; Throw:Width 1.8-2.2:1	Outputs	
Image Diagonal	40-500 in (102-1,270 cm)	Computer Monitor (For Inputs 1 & 2)	Dsub15 x 1
Image Width	2.5-33.3 ft (0.81-10.2 m)	Audio Output	Stereo: MiniStereo x 1
Throw Distance <<wide-tele>>	4.8-44 ft (1.5-13.4 m)	Amplifier	Stereo: 3 Watt
Projector Elevation Adjustment (legs)	up-to 9° Up	Speaker	1.3 in (3.3 cm) x 2 (Stereo)
Maximum Pitch	up-to 9° Up or Down	Fan Noise	as low as 35 dBA
Vertical Lens Shift (% of image height)	up-to 50% Up or Down	Cabinet Size (HxWxD)	7.1 x 16.1 x 18.5 in (18.0 x 41.0 x 47.1 cm)
Horizontal Lens Shift (% of image width)	up-to 15% Left or Right		(excluding legs)
Vertical Keystone Correction	Digital: up-to 30° Up or Down	Weight	32.7 lb (14.8 kg)
Horizontal Keystone Correction	Digital: up-to 30° Left or Right	Packaged Size (HxWxD)	15.4 x 22 x 24.4 in (39 x 56 x 62 cm)
Image Orientation	Normal, Reversed, Inverted	Packaged Weight	46.3 lb (21 kg)
Local Control / Power Management	Full Function / Auto Shutdown	Power Requirements	100-240V AC, 50/60 Hz
RS232 Control Port	Dsub9 x 1	Power Consumption	up-to 650 W
Remote Projector Control	Wireless/Wired x 1	Heat	up-to 2,218 BTU/hr
Wired Remote Control Port	MiniStereo x 1	Power Cord	11.8 ft (3.6 m) Type C13, Detachable
LAN Port	RJ45 x 1	Electrical Safety Compliance	IEC / UL / cUL
Computer Input in Pixels	up-to 1600x1200 (4:3), 1280x800 (16:10)	Electromagnetic Compatibility	FCC Class A
Analog 4x3 Inputs	UXGA, SXGA+, SXGA, XGA, SVGA, VGA, MAC	Security Facilities	Kensington® Security Slot
Analog Wide Inputs	WXGA	Operating Temperature	41-104°F (5-40°C)
Digital 4x3 Inputs	SXGA+, SXGA, XGA, SVGA, VGA	User Maintenance	Clear Air Vents/Covers, Replace Lamp
Digital Wide Inputs	WXGA	UPC	4571194671247
Video Formats	NTSC / PAL / SECAM / NTSC 4.43 / PAL-M&N	Limited Warranty: to the original end-use customer only	
Image Signal Resizing	Smart Scaling Technology	Projector	3 years
		Lamp	6 months ownership / 500 hours use (whichever occurs first)

Lamp contains Mercury. Do not put in trash. Dispose of as Hazardous Waste, according to Local, State or Federal Laws.

EIKI® is a registered trademark of Eiki International, Inc. DLP® is a registered trademark of Texas Instruments.

Specifications subject to change without notice. ©2010 Eiki International, Inc. Issued Nov. 4, 2010.

Eiki International, Inc., 30251 Esperanza, Rancho Santa Margarita, CA 92688-2132. Tel: 800-242-3454; Fax: 800-457-3454, E-mail: usa@eiki.com  
 In Canada: 310 First St., Unit 2, P.O. Box 156, Midland, ON L4R 4K8. Tel: 800-563-3454, Fax: 800-567-4069, E-mail: canada@eiki.com  
 Visit our website: <http://www.eiki.com>