


KEY FEATURES: Model LC-NB2UW

- Weighs less than 9 lbs! Footprint similar to a legal notepad!
- 1200 ANSI Lumens at 90% uniformity with a 250:1 contrast ratio.
- 3 panel LCD imaging delivers eye-popping, color saturated visuals.
- True SVGA resolution. XGA, SVGA, and VGA compatible.
- Smart data compression / expansion, and video scaling.
- Power zoom and focus. Digital keystone correction.
- Wireless remote with mouse. Laser pointer. 16X digital zoom.
- Accepts Composite and S-Video Input in most major standards.
- Displays both Regular 4:3 and Widescreen 16:9 ratio video formats.
- 3 Year* Projector Warranty! 6 Month * Lamp Warranty!

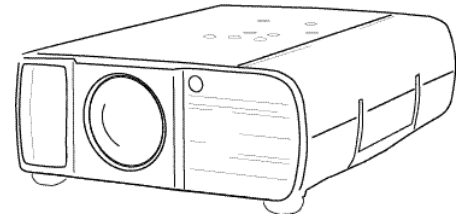

LC-NB2UW & LC-NB2U

INCLUDED ACCESSORIES: Owner's Manual. AC Power Cord. Lens Cover. VGA-type Computer Input Cable. Wireless Remote Control with Mouse and batteries (AA x2). Mouse cable for computer PS/2 port. Dust Cover.

OPTIONAL ACCESSORIES: Replacement Lamp. MAC Adapter. MAC Monitor Cable. 9 Pin Serial cable for mouse & RS-232 communications. Mouse cable for ADB port. Soft Carry Bag. Executive Carry Case with Computer Compartment. Luggage-Style ("wheelie") Carrying Case with Wheels, Telescoping Handle, and Detachable Computer Compartment. ATA-Style Shipping Case with Wheels and Telescoping Handle. Ceiling Mount. Ceiling Post and Plate. 33' (10m) Mouse Extension Cable.

SPECIFICATIONS: Model LC-NB2UW

Screen Brightness	1200 ANSI Lumens	Computer: Higher Resolutions	Displayed panned or Smart Compressed
Illumination Uniformity	90%	Computer: Lower Resolution	Displayed normal or Smart Expanded
Size of Color Palette	16.7 Million	Computer: Channels	1
Contrast Ratio	250:1 (Full ON/OFF)	Computer: Inputs	HD15 x 1
Horizontal Resolution	750 TV Lines	Computer: Monitor Out	HD15 x 1
Projection Lamp	150 Watt UHP	Computer: Audio In	Stereo: MiniStereo x 1
Light Organization	Polarized Beam Splitter	Video: Compatibility	NTSC / PAL / SECAM / NTSC 4.43 / PAL-M&N
Light Distribution	Dichroic Mirror & X-Prism System	Video: Formats Supported	Normal 4:3 and Wide Screen 16:9
Imaging System	0.9" PolySilicon active matrix TFT Panels x 3	Video: Image Sizing	Video Scaling Technology
Screen Pixels	800 x 600 in stripe configuration	Video: Channels	1
Total Pixels	1,440,000 (800 x 600) x 3	Video: Inputs	Composite: RCA x 1, S-Video x 1
Lens Type	Power Zoom and Focus	Video: Audio: Input	RCA x 2 (L&R)
Lens Specs	Speed: f:1.7-2.0; FL: 1.31-1.7 in. (33.2-43.1 mm.)	Audio: Amplifier	Mono: 1 Watts RMS
Lens Ratios	Zoom Max:Min: 1.3:1; Throw:Width: 1.80-2.33:1	Audio: Built In Speakers	1.58 x 1.18 in. (4x3cm) x 1
Image Diagonal	31-300 in. (78.74-762 cm.)	Audio Line Output	Stereo: MiniStereo x 1
Image Width	2-20 ft. (0.6-6.1 m.)	Fan Noise	Approximately 42 dB.
Throw Distance	4.6-46 ft. (1.4-14 m.)	Size (H x W x D)	4.1x9.5x12.8 in. (102.5x239x323 mm.)
Front Elevation / Maximum Tilt	up to 10° up	Weight	8.6 lbs. (3.9kg)
Anti Keystone	Fixed Image Offset, Ratio (Top:Bottom) 20:1	Packaged Size (H x W x D)	10.4x14.1x17.6 in. (262x356x446 mm.)
Keystone Correction	Digital (>+/- 12 degrees)	Packaged Weight	17.2 lbs. (7.8 kg.)
Scanning Frequency	Auto: H Sync. 15-80Hz; V Sync. 50-100 Hz.	Power Requirements	100-240V AC, 50/60 Hz.
Dot Clock	135 MHz.	Power Consumption / Heat	240 Watts / 819 BTU/hr. (207 KC/hr.)
Image Orientation	Normal, Reversed, Inverted	Power Cord	10' (3M) Type 3, Detachable
Local Control	Full Function	Safety Compliance	UL Listed
Remote Proj & Mouse Ctrl	Wireless (Infra Red) with Laser Pointer x 1	Security Facilities	Kensington® Security Slot
Control Port (Mouse / RS-232 Communications)	Mini DIN 8 Pin x 1	User Maintenance	Clean Air Filter, Replace Lamp
Computer Native Resolution	800 x 600 (SVGA)	Warranty: Projector	3 Yr. / 6000 Hr. *(Parts & Labor to Correct Defects)
Computer: Compatibility	XGA, SVGA, VGA	Warranty: Lamp	90 Days (Pro-Rata Replacement of Failed Lamp)
Computer: Formats	1024x768, 800x600, 640x480		* Whichever occurs first.

The following warning is required by the US FDA and pertains to the laser pointer in the wireless remote control of this projector.
Caution! Laser Radiation – Do not stare into beam. Max. Output: 1 mW. Wave Length: 660 +/- 20 mm. Class II Laser Product.

LC-NB2U (PC Card Model)

In addition to the features and specifications above, computerless slide shows can be created and presented with this model, using supplied software and removable flash memory. Software requires a Pentium CPU, Windows 95/98, and a minimum 32 Mb RAM and 10 Mb HD: as supplied, programming relies on notebook computer's PCMCIA slot. Includes 8 Mb SmartMedia flash memory card, PCMCIA adapter, and MCI SlideShow software on CD-ROM. More memory & other programming accessories available. Weight 8.82 lb (4.0 kg.).

Specifications subject to change without notice. ©2002 EIKI International, Inc. Printed in the USA. February 1, 2002.

Eiki International, Inc., 30251 Esperanza, Rancho Santa Margarita, CA 92688 Tel: 800-242-3454; Fax: 800-457-3454, E-mail: usa@eiki.com
In Canada, 310 First St.- Unit 2, P.O. Box 156, Midland, ON L4R 4K8 Phone: 800-563-3454, Fax: 800-567-4069 E-mail: canada@eiki.com

Fax-on-Demand: (Toll Free) 877-345-4329 • Visit our World Wide Web site: <http://www.eiki.com>