




LC-NB3S

SVGA Notebook Projector

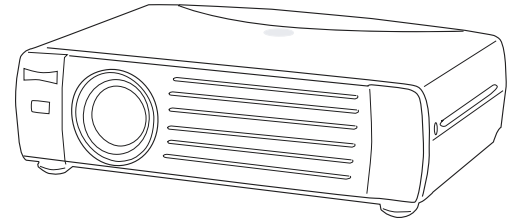

LC-NB3S

KEY FEATURES: Model LC-NB3S

- Weighs less than 9.5 lbs! Footprint similar to a legal notepad!
- 1700 ANSI Lumens, 85% uniformity, and 350:1 contrast ratio.
- 3 panel LCD imaging delivers a rich, color saturated picture.
- True SVGA resolution. XGA, SVGA, and VGA compatible.
- Quiet operation: fan noise as low as 37 dBA.
- Smart data compression / expansion, and video scaling.
- Power zoom and focus. Digital keystone correction.
- Wireless remote with mouse. 7X digital zoom.
- Accepts Composite, S, and Component Video in all major standards.
- Displays both Regular 4:3 and Widescreen 16:9 ratio video formats.
- Supports HDTV Input at 480i/p, 575i/p, 720p, 1035i, and 1080i.
- 3 Year* Projector Warranty!

INCLUDED ACCESSORIES: Owner's Manual. AC Power Cord. Lens Cover. VGA-type Computer Input Cable. Wireless Remote Control With Mouse and Batteries (AA x 2). Mouse cable for computer PS/2 Port. Stereo Audio Cable, Composite Video Cable. Soft Carry Bag.

OPTIONAL ACCESSORIES: Replacement Lamp. MAC Adapter. MAC Monitor Cable. 9 Pin Serial cable for mouse & RS-232 communications. Mouse cable for ADB port. Executive Carry Case with Computer Compartment. Luggage-Style ("wheelie") Carrying Case with Wheels, Telescoping Handle, and Detachable Computer Compartment. ATA-Style Shipping Case with Wheels and Telescoping Handle. Ceiling Mount. Ceiling Post and Plate. 33' (10m) Mouse Extension Cable for Control Port.

SPECIFICATIONS: Model LC-NB3S

Screen Brightness	1700 ANSI Lumens
Illumination Uniformity	85%
Size of Color Palette	16.7 Million
Contrast Ratio	350:1 (Full ON/OFF)
Horizontal Resolution	750 TV Lines
Projection Lamp	200 Watt UHP
Estimated Lamp Life	2,000 Hrs.
Imaging System	0.9" PolySilicon active matrix TFT Panels x 3
Screen Pixels	800 x 600 in stripe configuration
Total Pixels	1,440,000 ((800 x 600) x 3)
Lens Type	Power Zoom and Focus
Lens Specs	Speed: f:1.9-2.1; FL: 0.84 in.~1.01 in. (21.3~25.6 mm)
Lens Ratios	Zoom Max:Min: 1.2:1; Throw:Width: 1.15~1.39:1
Image Diagonal	40-300 in. (101.6~762 cm)
Image Width	2.7~20 ft. (0.83~6.1 m.)
Throw Distance	3.6~27.7 ft. (1.1~8.44 m.)
Front Elevation / Maximum Tilt	up to 15.6° up/ +/- 20°
Anti Keystone	Fixed Image Offset, Ratio (Top:Bottom) 9:1
Vertical Keystone Correction	Digital up to 20° up or down
Horizontal Keystone Correction	Digital up to 10° left or right
Scanning Frequency	Auto: H Sync. 15-80kHz; V Sync. 50-100Hz
Dot Clock	100 MHz
Image Orientation	Normal, Reversed, Inverted
Local Control / Power Management	Full Function / Auto Shut-Off
Remote Proj & Mouse Ctrl	Wireless (Infra Red) x 1
Control Port (Mouse / RS-232)	USB x 1, Mini DIN 8 Pin x 1
Computer Native Resolution	800 x 600 (SVGA)
Computer: Compatibility	XGA, SVGA, VGA
Computer: Formats	1024x768, 800x600, 640x480
Computer: Higher Resolutions	Displayed panned or Smart Compressed

Computer: Lower Resolution	Displayed normal or Smart Expanded
Computer: Channels	1
Computer: In	HD15 x 1
Computer: Out	HD15 x 1
Computer: Audio In	Stereo: MiniStereo x 1
Video: Compatibility	NTSC / PAL / SECAM / NTSC 4.43 / PAL-M&N
Video: Formats Supported	Normal 4:3 and Wide Screen 16:9
Video: Image Sizing	Video Scaling Technology
Video: Channels	1
Video: In	RCA x 3 (Composite/Component: Y,Pb/Cb,Pr/Cr) S-Video x 1
Video: Audio: Input	RCA x 2 (L&R)
Audio: Amplifier	Mono: 1 Watts RMS
Audio: Built In Speaker	1.58 x 1.18 in. (4x3cm) x 1
Audio: Speaker Output	Stereo: MiniStereo x 1
Fan Noise	37 dBA
Cabinet Size** (HxWxD)	3.5 x 13.1 x 10.3 in. (89.5 x 333 x 260.9 mm.)
	** excluding foot
Weight	9.5 lbs. (4.3 kg)
Packaged Size (H x W x D)	14.8 x 18.0 x 15.6 in. (377 x 457 x 396 mm)
Packaged Weight	19.4 lb (8.8 kg)
Power Requirements	100-240V AC, 50/60Hz
Power Consumption / Heat	300 W / 1024 BTU/hr (258 Kcal/hr)
Power Cord	10' (3M) Type 3, Detachable
Safety Compliance	UL Listed
Operating Temperature	41~95°F (5~35°C)
User Maintenance	Clean Air Filter, Replace Lamp
Security Facilities	Kensington® Security Slot
Warranty: Projector	3 Yr. / 6000 Hr. * (Parts & Labor to Correct Defects)
Warranty: Lamp	90 Days (Failed Lamp Replaced Pro-Rata)
	* Whichever occurs first

Specifications subject to change without notice. ©2002 Eiki International, Inc. Issued March 25, 2002.

Eiki International, Inc., 30251 Esperanza, Rancho Santa Margarita, CA 92688. Tel: 800-242-3454; Fax: 800-457-3454, E-mail:usa@eiki.com
 In Canada, 310 First St.- Unit 2, P.O. Box 156, Midland, ON L4R 4K8 Phone: 800-563-3454, Fax: 800-567-4069 E-mail: canada@eiki.com
Fax-on-Demand: (Toll Free) 877-345-4329 • Visit our World Wide Web site: <http://www.eiki.com>