


KEY FEATURES:

- Projects true SVGA: 800 x 600 pixels with all the clarity of 3 panel LCD technology.
- 1250 ANSI Lumens brightness. Up to a 300" diagonal (20' wide) picture.
- Smart data compression/expansion, and video scaling technology.
- Displays higher resolutions with panning, or smart compressed.
- Displays lower resolutions normal, or smart expanded.
- 130 MHz dot clock, for compatibility with many workstations.
- Projects up to a 300' diagonal picture from distances up to 46'.
- Wireless remote with mouse control and power zoom and focus.
- 16 increment Digital Zoom magnifies the image, not the pixels.
- 3 Year* Projector Warranty! 6 Month* Lamp Warranty!

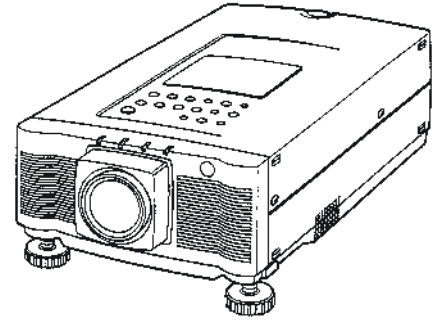

BRIGHT!
1250 ANSI LUMENS

OTHER IMPORTANT FEATURES:

- Superior Intensity Discharge long-life 160 Watt lamp.
- Composite & S-Video Input in NTSC, PAL, SECAM / NTSC 4.43 / PAL-M.
- Displays both Regular 4:3 and Widescreen 16:9 ratio video formats.
- International Power: 100~120 / 200~240V AC, 50/60 Hz (automatic).
- Included Accessories: Owner's Manual, AC Power Cord. VGA-type Computer Input Cable. MAC Adapter. Wireless Remote with Mouse Control & Batteries (AA x 2). Mouse Cables for PS/2, Serial Port, ADB Port. Dust Cover.
- Optional Accessories: MAC Monitor Cable. Additional Input Cables/Adapters. Replacement Lamp. Soft Carry Bag. Luggage-Style Travel Case with Wheels and Telescoping Handle. ATA-Style Shipping Case with Wheels and Telescoping Handle. Ceiling Mount, Post and Plate.

SPECIFICATIONS:

Screen Brightness.....	1250 ANSI Lumens
Illumination Uniformity.....	85%
Size of Color Palette	16.7 Million
Contrast Ratio:.....	300:1 (ANSI 100:1)
Horizontal Resolution.....	750 TV Lines
Projection Lamp.....	160 Watt Superior Intensity Discharge
Estimated Lamp life	2,000 Hours
Replace Lamp	1,000 Hours
Imaging System	1.3" PolySilicon TFT Panels x 3
Screen Pixels.....	800 x 600
Total Pixels.....	1,440,000 (800 x 600 x 3)
Lens Type.....	1:1.3 ratio Power Zoom and Focus
Lens Speed & Focal Lengthf:.....	1.8~2.1; 1.91~2.48 in. (48.4~62.8 mm.)
Lens Protection.....	Auto Lens Retract
Image Diagonal.....	30"~300"
Image Width.....	2'~20' (0.61m~6.1m)
Throw Distance.....	4.6'~46.1' (1.4~14.04 m)
Width-to-Throw Factor	Approximately 1.78~2.3
Front Elevation / Maximum Tilt.....	up to 6° up (one touch)
Anti Keystone.....	Preset Lens Offset, Ratio (Top:Bottom) 19:1
Scanning Frequency	Auto: H Sync. 15-100kHz; V Sync. 50-100Hz
Dot Clock.....	130 MHz
Image Orientation	Normal, Reversed, Inverted
Local Control.....	Full Function
Remote Control.....	Wireless (IR) Projector & Mouse x 1
Mouse Control Port.....	12 Pin DIN x 2
RS-232 Control Port.....	On Mouse Control Port #2: 12 Pin DIN x 1
Computer: Native Resolution	SVGA (800x600)
Computer: Compatibility.....	XGA, SVGA, VGA and Macintosh

Computer: Formats	1024x768, 832x624, 800x600, 640x480
Computer: Higher Resolutions.....	Displayed Panned, or Smart Compressed
Computer: Lower Resolutions	Displayed Normal, or Smart Expanded
Computer: Channels	2
Computer: Inputs.....	HDB15 x 2
Computer: Monitor Out.....	HDB15 x 1
Computer: Audio Input	Stereo: MiniStereo x 2
Video: Compatibility.....	NTSC / PAL / SECAM / NTSC 4.43 / PAL-M
Video: Formats Supported.....	Normal 4:3 and Wide Screen 16:9
Video: Image Sizing	Video Scaling Technology
Video: Channels.....	1
Video: Inputs	Composite: RCA x 1; Y/C: S-Video x 1
Video: Output	Composite: RCA x 1
Video: Audio Input.....	Stereo: RCA x 2 (L&R)
Audio: Amplifier	Stereo: 2 Watts RMS each (L&R) 3 Watt peak
Audio: Built-in Speakers	Stereo: 1.57 x 2.75 in. (4 x 7 cm.) x 2
Audio: External Speaker Output	Stereo: MiniStereo x 1
Fan Noise.....	less than 45 dB
Size (H x W x D).....	5.8 x 10.8 x 16.3 in. (145.5 x 272 x 412.5 mm.)
Weight.....	14.6 lbs. (6.6 kg)
Packaged Size (H x W x D).....	12.5x15.9x22.2 in.(317x404x564 mm.)
Packaged Weight.....	21.1 lbs. (10.0 kg)
Power Requirements.....	100~120V / 200~240V AC, 50/60Hz
Power Consumption	250 Watts / 854 BTU/hr
Power Cord	10' (3M) Type 3, Detachable
Safety Compliance	UL Listed
User Maintenance	Clean Air Filter, Replace Lamp
Warranty: Projector ..	3 Yrs/6000 hrs * (Parts & Labor to Correct Defects)
Warranty: Lamp.....	6 Mo/1000 hrs * (Pro Rata Replacement of Failed Lamp)

Specifications subject to change without notice.

©1999 EIKI International, Inc. 6/1/1999.

* Whichever Occurs First

Eiki International, Inc., 26794 Vista Terrace Dr., Lake Forest, CA 92630 Phone: 800-242-3454; Fax: 800-457-3454, E-mail: infousa@eiki.com

In Canada: 310 First St., Unit 2, P.O. Box 156, Midland, ON L4R 4K8 Tel: 800-563-3454, Fax: 800-567-4069 E-mail: infocanada@eiki.com

Fax-on-Demand: (Toll Free) 877-345-4329 Visit our World Wide Web site: <http://www.eiki.com>