




X983

XGA Boardroom Two Series

KEY FEATURES: Model LC-X983

- 1600 ANSI Lumens bright, 90%+ uniformity, and 300:1 contrast ratio.
- 3 panel LCD imaging delivers eye-popping, color saturated visuals.
- True XGA resolution. SXGA, XGA, SVGA, VGA and MAC compatible.
- Weighs only 15.2 lbs! Fits in airline overhead storage compartments.
- Smart data compression / expansion, and video scaling.
- Power zoom and focus. Preset image offset. Digital keystone correction.
- Wireless remote with mouse and laser pointer. 49X digital zoom.
- Accepts DVD & HDTV Component Video, plus Composite and S-Video Input.
- Displays both Regular 4:3 and Widescreen 16:9 ratio video formats.
- 3 Year* Projector Warranty! 6 Month* Lamp Warranty!

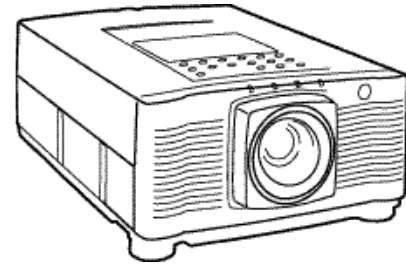

LC-X983

INCLUDED ACCESSORIES: Owner's Manual. AC Power Cord. Lens Cover. VGA-type Computer Input Cable. MAC adapter. Wireless Remote Control with Mouse and Laser Pointer & Batteries (AA x 2). Mouse cable for computer PS/2, Serial, and ADB Port. Dust Cover.

OPTIONAL ACCESSORIES: Replacement Lamp. MAC Monitor Cable. Soft Carry Bag. Luggage-Style Carrying Case with Wheels, Telescoping Handle, and Detachable Computer Compartment. ATA-Style Shipping Case with Wheels and Telescoping Handle. Wideangle and Telephoto Lenses. Ceiling Mount. Ceiling Post and Plate. 33' (10m) Mouse Extension Cable.

SPECIFICATIONS: Model LC-X983

Screen Brightness1600 ANSI Lumens	Computer: Formats1280x1024, 1024x768, 800x600, 640x480
Illumination Uniformity90%+	Computer: Image SizingNormal, or Smart Compressed or Expanded
Size of Color Palette16.7 Million	Computer: Channels2
Contrast Ratio300:1 (Full ON/OFF)	Computer: InputsHD15 x 2
Horizontal Resolution800 TV Lines	Computer: Monitor OutHD15 x 1
Projection Lamp200 Watt UHP	Computer: Audio InStereo: MiniStereo x 2
Recommended Lamp Replacement1,000 Hrs.	Video: CompatibilityNTSC / PAL / SECAM / NTSC 4.43 / PAL-M&N
Light OrganizationPolarized Beam Splitter	Video: Formats SupportedNormal 4:3 and Wide Screen 16:9
Light DistributionDichroic Mirror & X-Prism System	Video: Image SizingVideo Scaling Technology
Imaging System3" PolySilicon active matrix TFT Panels x 3	Video: Channels1
Screen Pixels1024 x 768 in stripe configuration	Video: Input Composite:RCA x 1, S-Video x 1; Component: RCA x 3
Total Pixels2,359,296 (1024 x 768) x 3	Video: Component SystemsDVD (Y, Cb, Cr) and HDTV (Y, Pb, Pr)
Lens TypePower Zoom and Focus	Video: HDTV Standards Supported1080i, 1035i, 720p, 575p, 480p
Lens SpecsSpeed: f:1.8-2.1; FL: 1.91-2.48 in. (48.4-62.8 mm)	Video: Audio: InputRCA x 2 (L&R)
Lens RatiosZoom Max:Min: 1.3:1; Throw:Width: 1.82-2.37:1	Audio: Amplifier Audio:Built In Speakers Stereo: 1.57 x 2.75 in. (4x7cm) x 2
Image Diagonal30-400 in. (76.2-1016 cm)	Audio: Speaker OutputStereo: MiniStereo x 1
Image Width2-26.7 ft. (0.6-8.2 m.)	Fan NoiseApproximately 42 dB
Throw Distance4.8-63.2 ft. (1.46-19.26 m.)	Size(H x W x D) 5.73x10.71x16.24 in. (145.5x272x412.5 mm.)
Front Elevationup to 6° up	Weight15.2 lbs. (6.9 kg)
Anti KeystoneOptical: Fixed Offset (Top:Bottom) Ratio 20:1 (+10°)	Packaged Size(H x W x D) 12.5x16x22.3 in. (317x404x564 mm.)
Keystone CorrectionDigital: Variable Adjustment +30° - -30°	Packaged Weight22.1 lbs. (10.0 kg)
Scanning FrequencyAuto: H Sync. 15-100 kHz; V Sync. 50-100 kHz	Power Requirements100-240V AC, 50/60Hz
Dot Clock165 MHz	Power Consumption / Heat300 Watts / 1024 BTU/hr. (258 KC/hr.)
Image OrientationNormal, Reversed, Inverted	Power Cord10' (3M) Type 3, Detachable
Local Control / Power ManagementFull Function / Auto Shut-Off	Safety ComplianceUL Listed
Remote Projector & Mouse ControlInfra Red, with Laser Pointer x 1	Security FacilitiesKensington® Security Slot
Control Port (Mouse / RS-232 Communications)Mini DIN 8 Pin x 2	User MaintenanceClean Air Filter, Replace Lamp
Computer Native Resolution1024 x 768 (XGA)	Warranty: Projector3 Yr / 6000 Hr *(Parts/Labor to Correct Defects)
Computer: CompatibilitySXGA, XGA, SVGA, VGA & MAC	Warranty: Lamp6 Mo / 1000 Hr *(Failed Lamp Replaced Pro-Rata)

* whichever occurs first

The following warning is required by the US FDA and pertains to the laser pointer in the wireless remote control of this projector.
Caution! Laser Radiation – Do not stare into beam. Max. Output: 1 mW. Wave Length: 660 +/- 20 mm. Class II Laser Product.

Specifications subject to change without notice. ©2000 EIKI International, Inc. Printed in the USA. June 15, 2000

Eiki International, Inc., 26794 Vista Terrace Dr., Lake Forest, CA 92630 Tel: 800-242-3454; Fax: 800-457-3454, E-mail: infousa@eiki.com
 In Canada, 310 First St.- Unit 2, P.O. Box 156, Midland, ON L4R 4K8 Phone: 800-563-3454, Fax: 800-567-4069 E-mail: infocanada@eiki.com

Fax-on-Demand: (Toll Free) 877-345-4329 • Visit our World Wide Web site: <http://www.eiki.com>