


KEY FEATURES: Model LC-XB24

Weighs only 5.3 lbs (2.4 kg)! Footprint similar to a sheet of paper!
 2500 ANSI Lumens, 85% uniformity, and 450:1 contrast ratio.
 3 panel LCD imaging delivers a rich, color saturated picture.
 True XGA resolution. WXGA, UXGA~VGA, and MAC compatible.
 Quiet operation: fan noise as low as 30.5 dBA.
 Smart data compression / expansion, and video scaling.
 Convenient mid-range (1.2:1) manual zoom and focus lens.
 Preset image offset. Vertical digital keystone correction.
 Accepts Composite, S, and Component Video in all major standards.
 Displays both 4:3 and 16:9 formats. Supports most HDTV resolutions.
 Converts Interlace to Progressive scan. 3-2 / 2-2 Pulldown support.
 Variable Power Management option. Optional local or remote keylock.
 VGA-type computer input. Slideshow Page Up/Down on remote control.
 Custom warm-up screen option. Green chalkboard projection mode.
 Wireless remote control. 16X digital zoom. Turn OFF and GO!
 3 Year* Projector Warranty!

XGA "Brilliant" Series

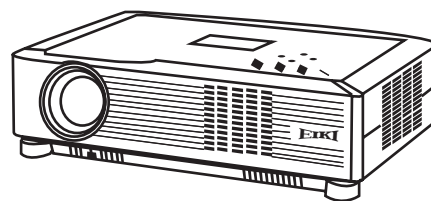

LC-XB24

Outstanding Features:

1. Low cost / High Brightness = affordable & low cost per lumen.
2. Compact and Lightweight.: easy to carry or install.
3. UXGA and WXGA compatible. Interlace to Progressive conversion.
4. Turn ON and Show! (Countdown can be optionally skipped.)
5. Turn OFF and GO! (AC power cord can be removed immediately after OFF).

Included Accessories: Owner's Manual on CD-ROM. Quick Start Guide. AC Power Cord. Lens Cover. VGA type Computer Input Cable (HD15 ~ HD15). Wireless Remote Control with & Batteries (AA x 2).

Optional Accessories: Soft Carry Bag. Replacement Lamp. Remote Control with Laser Pointer. USB cable for slideshow Page Up / Page Down. Component Video Input Cable (HD15~3-RCA). MAC Adapter. MAC Monitor Cable. DB9~Mini Din-8 cable for RS-232 control. Executive Carry Case with Computer Compartment. ATA-Style Shipping Case with Wheels and Telescoping Handle. Ceiling Mount. Ceiling Post and Plate. 33' (10m) Extension Cable for Serial Cable. EZ-250 Local Control. NPC-1 Network Control.

SPECIFICATIONS: Model LC-XB24

Screen Brightness	up to 2,500 ANSI Lumens	Video: Compatibility	NTSC / PAL / SECAM / NTSC 4.43 / PAL-M&N
Illumination Uniformity	85%	Video: HD Compatibility	480i/p, 575i/p, 720p, 1035i, 1080i
Size of Color Palette	16.7 Million	Video: Formats Supported	Normal 4:3 and Wide Screen 16:9
Contrast Ratio	450:1 (Full ON/OFF)	Video: Image Sizing	Video Scaling Technology
Projection Lamp	200 Watt UHP	Image Signal Inputs	
Estimated Lamp Life	up to 3000 Hours of Use	* Computer In 1 / Component In (with optional adapter)	HD15 x 1
Imaging System	0.63" PolySilicon active matrix TFT Panels x 3	* Computer In 2 / Monitor out (switchable)	HD15 x 1
Screen Pixels	1024 x 768 in stripe configuration	Video In :	RCA x 1 (Composite) S-Video x 1 (Y/C)
Total Pixels	2,359,296 ((1024 x 768) x 3)	Audio Signal Inputs	
Lens Type	Manual Zoom and Focus	* Computer 1 & 2 / Component	Stereo: Ministereo x 1
Lens Specs	Speed: f:1.65~1.81; FL: 0.886~1.063 in. (22.5~27 mm)	* Composite/S-Video	RCA x 2 (L & R)
Lens Ratios	Zoom Max:Min: 1.2:1; Throw:Width: 1.72~2.07:1	Audio: Amplifier	Mono: 1 Watt RMS
Image Diagonal	40~300 in. (102~762 cm)	Audio: Built In Speakers	1.1 in. (2.8 cm) x 1
Image Width	2.67~20 ft. (0.84~6.1 m.)	Audio: Output	Stereo: Ministereo x 1 (Variable)
Throw Distance (Wide / Tele)	4.6~41.3 ft. (1.4~12.6 m.)	Fan Noise	as low as 30.5 dBA
Front Elevation / Maximum Tilt	up to 10° up / +/- 10°	Cabinet Size** (HxWxD)	2.7 x 11.6 x 8.2in. (69.5 x 294.5 x 208mm.)
Anti Keystone	Fixed Image Offset, Ratio (Top:Bottom) 9:1		** excluding legs and lens
Vertical Keystone Correction	Digital: up to 20° up or down	Weight	5.3 lbs. (2.4 kg)
Scanning Frequency	Auto: H Sync. 15-100kHz; V Sync. 50-100Hz	Packaged Size (H x W x D)	7.9 x 16.2 x 16.6in. (202 x 413 x 424 mm.)
Dot Clock	140 MHz	Packaged Weight	9.7 lb (4.4 kg)
Image Orientation	Normal, Reversed, Inverted	Power Requirements	100-240V AC, 50/60Hz
Local Control / Power Management	Full Function / Auto Shutdown	Power Consumption	275 ~ 230 Watts
Remote Projector Ctrl	Wireless (Infra Red) x 1	Heat	939 BTU (237 KC) ~ 785 BTU (198 KC)
Slideshow Page Up / Page Down Port	USB type B x 1	Power Cord	10' (3M) Type 3, Detachable
Service Port (for RS-232 control)	Mini DIN 8 Pin x 1	Safety Compliance	UL, cUL, IEC
Computer Native Resolution	1024 x 768 (XGA)	Security Facilities	Kensington® Security Slot
Computer: Compatibility	UXGA, SXGA+, SXGA, WXGA, XGA, SVGA, VGA & MAC	Operating Temperature	41~95°F (5~35°C)
Computer: Formats	1600 x 1200 through 640x480	User Maintenance	Clean Air Filter, Replace Lamp
Computer: Higher Resolutions	Displayed panned or Smart Compressed	Warranty: (to the original end-use customer)	
Computer: Lower Resolution	Displayed normal or Smart Expanded	Projector:	3 Yr. / 6000 Hr. *(Parts & Labor to Correct Defects)
		Lamp:	90 Days (Failed Lamp Replaced Pro-Rata)
			* Whichever occurs first

Lamp contains Mercury. Do not put in trash. Dispose of as Hazardous Waste, according to Laws in your jurisdiction.

Specifications subject to change without notice. ©2006 Eiki International, Inc. Issued November 10, 2006.

Eiki International, Inc., 30251 Esperanza, Rancho Santa Margarita, CA 92688-2132. Tel: 800-242-3454; Fax: 800-457-3454, E-mail: usa@eiki.com

In Canada: 310 First St., Unit 2, P.O. Box 156, Midland, ON L4R 4K8. Tel: 800-563-3454, Fax: 800-567-4069, E-mail: infocanada@eiki.com

Visit our World Wide Web site: <http://www.eiki.com>