




LC-XB41

XGA "Brilliant" Series

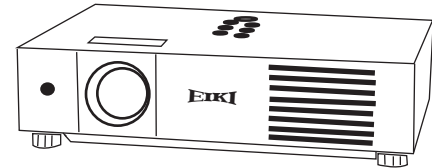

LC-XB41

KEY FEATURES: Model LC-XB41

- 4000 ANSI Lumens, 85% uniformity, and 500:1 contrast ratio.
- Weighs less than 8 lbs! Compact, low-profile design!
- 3 panel LCD imaging delivers a rich, color saturated picture.
- XGA resolution. WXGA, UXGA ~ VGA and MAC compatible.
- Quiet operation: fan noise as low as 29 dBA in Eco mode.
- Smart data compression / expansion, and video scaling.
- Convenient mid-range 1.2:1 manual zoom and focus lens.
- Two VGA computer inputs, plus one VGA computer monitor output.
- Preset image offset. Vertical digital keystone correction.
- Accepts Composite, S, and Component Video in all major standards.
- Displays both 4:3 and 16:9 formats. Supports most HDTV resolutions.
- Converts Interlace to Progressive scan. 3-2 (and 2-2) Pull-down support.
- Variable Power Management option. Optional local or remote keylock.
- Custom warm-up screen image option. Factory defaults reset.
- Wireless remote control. 16X digital zoom. Auto input search.
- Green chalkboard projection mode. 3 Year* Projector Warranty!

Included Accessories: Quick Start Guide. Owner's Manual on CD-ROM. AC Power Cord. VGA-type Computer Input Cable (HD15 ~ HD15). Wireless Remote Control & Batteries (AA x 2).

Optional Accessories: Soft Carry Bag. Replacement Lamp. VGA-type Computer Input Cable (HD15 ~ HD15). Component Video Input Cable (HD15~3-RCA). Scart Video Input Cable (HD15~Scart). MAC Adapter. MAC Monitor Cable. DB9~Mini DIN-8 cable for RS-232 control. Luggage-Style ("wheelie") Carrying Case with Wheels, Telescoping Handle, and Detachable Computer Compartment. ATA-Style Shipping Case with Wheels and Telescoping Handle. Ceiling Mount. Ceiling Post and Plate. 33' (10m) Extension Cable for Serial Cable. EZ-250 Local Control. NPC-1 Network Control.

SPECIFICATIONS: Model LC-XB41

Brightness up to 4,000 ANSI Lumens
 Illumination Uniformity 85%
 Size of Color Palette 16.7 Million
 Contrast Ratio 500:1 (Full ON/OFF)
 Projection Lamp 275 Watt NSHA
 Estimated Lamp Life up to 2500 Hours of Use
 Imaging System 0.8" PolySilicon active matrix TFT Panels x 3
 Screen Pixels 1024 x 768 in stripe configuration
 Total Pixels 2,359,296 ((1024 x 768) x 3)
 Lens Type Manual Zoom and Focus
 Lens Specs Speed: f:1.7~2.1; FL: 1.05~1.26 in. (26.7~32 mm)
 Lens Ratios Zoom Max:Min: 1.2:1; Throw:Width: 1.64~2.00:1
 Image Diagonal 33~300 in. (84~762 cm)
 Image Width 2.2~20 ft. (0.67~6.1 m.)
 Throw Distance (tele-wide) 4.3~32.8 ft. (1.3~10 m.)
 Front Elevation Up to 8.9°
 Maximum Tilt anywhere up to 360° off the horizontal axis
 Anti Keystone Preset Image Offset, Ratio (Top:Bottom) 9:1
 Vertical Keystone Correction Digital: up to 40° up or down
 Scanning Frequency Auto: H Sync. 15-100kHz; V Sync. 50-100Hz
 Dot Clock 140 MHz
 Image Orientation Normal, Reversed, Inverted
 Local Control / Power Management Full Function / Auto Shutdown
 Remote Projector Ctrl Wireless (Infra Red) x 1
 Service Port (for RS-232 control) Mini DIN 8 Pin x 1
 Computer Native Resolution 1024 x 768 (XGA)
 Computer: Compatibility UXGA, SXGA+, SXGA, WXGA, XGA, SVGA,
 VGA & MAC
 Computer: Formats 1600 x 1200 through 640x480
 Computer: Higher Resolutions Displayed panned or Smart Compressed
 Computer: Lower Resolution Displayed normal or Smart Expanded

Video: Compatibility NTSC / PAL / SECAM / NTSC 4.43 / PAL-M&N
 Video: HD Compatibility 480i/p, 575i/p, 720p, 1035i, 1080i
 Video: Formats Supported Normal 4:3 and Wide Screen 16:9
 Video: Image Sizing Video Scaling Technology
 Image Signal Inputs
 Computer 1 HD15 x 1
 Computer 2 / Component Video (with optional adapter) HD15 x 1
 Video - Composite RCA x 1
 - S-Video S-Video x 1
 Audio Signal Inputs
 Computer 1 & 2 / Component (Stereo) Ministereo x 1
 Composite/S-Video (Stereo) RCA x 2
 Outputs
 Computer Monitor: HD15 x 1
 Audio (Stereo) - Variable Line: Ministereo x 1
 Sound: Amplifier (Mono): 1 Watt RMS
 Sound Speaker: 1.1 in. (2.8 cm) x 1
 Fan Noise as low as 29 dBA
 Cabinet Size (HxWxD) 3.07 x 13.15 x 9.17 in. (78 x 334 x 233mm.)
 Weight 7.3 lb. (3.3 kg.)
 Packaged Size (H x W x D) 8.4 x 16.5 x 14.4 in. (214 x 420 x 365mm.)
 Packaged Weight 11.9 lb. (5.4kg.)
 Power Requirements 100-240V AC, 50/60Hz
 Power Consumption up to 385 Watts
 Heat up to 1314 BTU (331 KC)
 Power Cord 10' (3M) Type 3, Detachable
 Safety Compliance UL, cUL, IEC
 Security Facilities Kensington® Security Slot
 Operating Temperature 41~95°F (5~35°C)
 User Maintenance Clean Air Filter, Replace Lamp
 Warranty: (to the original end-use customer)
 Projector: .. 3 Yr. / 6000 Hour Use *(Parts & Labor to Correct Defects)
 Lamp: 90 Days (Failed Lamp Replaced Pro-Rata)
 * Whichever occurs first

Outstanding Features

1. High brightness and contrast, with up to 3000 hours est. lamp life.
2. Two VGA inputs plus one VGA monitor output.
3. Project straight up or down: projector supports pitch through 360°.

4. Integrated lens cover can't be misplaced.
5. UXGA & WXGA compatible. Interlace to Progressive conversion.
6. Turn ON and Show! (Countdown can be optionally skipped.)
7. Turn OFF and Go! (A/C cord can be removed immediately after

Lamp contains Mercury. Do not put in trash. Dispose of as Hazardous Waste, according to Local, State or Federal Laws.