



Projectors... and More!

LC-XBM26W

2,600 ANSI lumens bright with 85% uniformity and a 2000:1 contrast ratio. Native XGA resolution. Compatible with inputs up-to UXGA and WUXGA. Supports analog video input in all color standards up-to 1080i. 3 panel LCD imaging delivers a rich, color-saturated picture. 8-bit color processing yields a 16.7 million color palette. Convenient midrange (1.2:1) manual zoom and focus lens. Fixed image offset. Automatic vertical digital keystone correction. Two Dsub15 computer inputs. Switchable monitor output. 10 W sound system. Mic input for PA. Closed Caption decoding (NTSC). Built-in wired LAN connection for projector monitoring and control. Power management and Eco mode help prolong lamp life. Wireless remote control. Digital zoom 50-400%. Color board modes. Custom warm-up screen option. Auto input selection. Kensington® security slot. Local or remote keylock functions. Warranties. Projector: 3 years. Air Filter: 2 years. Lamp: 1 year.

LC-XBM26W


“W” for new white cabinet

2,600 ANSI Lumens / XGA / 3LCD

Long Life Lamp and Air Filter

Auto Iris Heightens Contrast Ratio

10 W Sound System & Mic Input for PA

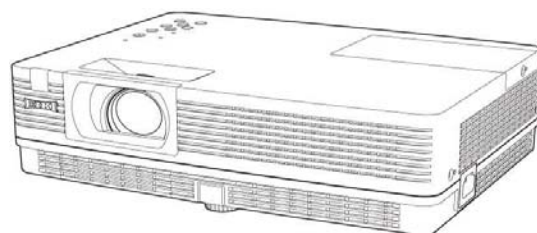

Included Accessories: Quick Start Guide, Owner's Manual on CD-ROM, Network Software on CD-ROM, Power Cord, VGA Computer Input Cable (Dsub15 to Dsub15), Wireless Remote Control (with 2 AAA Batteries), Lens Cap, S-Video Input Cable (Dsub15 to S-Video).

Optional Accessories: Replacement Lamp, Replacement Filter, Component Video Input Adapter Cable (Dsub15 to 3 RCA), RS-232 Control Cable (Dsub9 to Dsub9), Soft Carry Bag, Ceiling Mount Post & Plate.

SPECIFICATIONS: Model LC-XBM26W

Brightness	up-to 2,600 ANSI Lumens	Image Signal Inputs	
Contrast Ratio	up-to 2000:1	1. Analog Computer /	Dsub15 x 1
Illumination Uniformity (corner to center)	85%	Component Video with optional adapters:	
Resolution and Aspect Ratio	XGA (1024x768), 4:3	S-Video with supplied adapter	
Color Reproduction	8-bit (16.7 million colors)	2. Analog Computer /	
Projection Lamp	215 Watts UHP	Switchable Monitor Output Port:	Dsub15 x 1
Estimated Lamp Life	up-to 6,000 Hours	3. Composite Video:	RCA x 1
Imaging System	0.55 in (14 mm) LCD Panels x 3	Audio Signal Inputs	
Total Pixels	2,359,296 ((1024x768) x 3)	Computer Audio Input / Microphone Input	MiniStereo x 1
Scanning Frequency	Auto: H: 15-100 kHz; V: 50-100 Hz	Video Audio Input	Stereo: RCA x 2
Pixel Clock	up-to 140 MHz	Outputs	
Lens	Attached - Manual Zoom and Focus	Computer Monitor (by switchable input port)	Dsub15 x 1
Lens Specs	Speed: f. 2.00-2.15; FL: 0.724-0.869 in (18.38-22.06 mm)	Audio Output	Variable, Stereo: MiniStereo x 1
Lens Ratios	Zoom Max:Min: 1.2:1; Throw:Width 1.62-1.92:1	Amplifier	10 Watt
Image Diagonal	40-300 in (102-762 cm)	Speaker	1.6 in (4.1 cm) x 1
Image Width	2.8-20 ft (0.7-6.1 m)	Fan Noise	as low as 29 dBA
Throw Distance	4.3-38.7 ft (1.3-11.8 m)	Cabinet Size (HxWxD)	3.98 x 13.13 x 9.72 in (10.1 x 33.4 x 24.7 cm) (excluding legs)
Projector Elevation Adjustment (legs)	up-to 10° Up	Weight	6.4 lb (2.9 kg)
Maximum Pitch	up-to 30° Up or Down	Packaged Size (HxWxD)	8.3 x 16.5 x 15.7 in (21 x 42 x 40 cm)
Vertical Lens Shift (% of image height)	Fixed: 36% Up	Packaged Weight	11 lb (5 kg)
Vertical Keystone Correction	Digital: up-to 30° Up or Down	Power Requirements	100-240V AC, 50/60 Hz
Image Orientation	Normal, Reversed, Inverted	Power Consumption	0.4 W in Eco Standby mode, up-to 286 W
Local Control / Power Management	Full Function / Auto Shutdown	Heat	up-to 1,058 BTU/hr
RS232 Control Port	Dsub9 x 1	Power Cord	10 ft (3 m) Type C13, Detachable
Remote Projector Control	Wireless (Infra Red) x 1	Electrical Safety Compliance	IEC / UL / cUL
LAN Port	RJ45 x 1	Electromagnetic Compatibility	FCC Class B, CE Mark
Computer Input in Pixels	up-to 1600x1200 (4:3), 1920x1200 (16:10)	Security Facilities	Kensington Security Slot, PIN Code and Key Locks
Analog 4x3 Inputs	UXGA, SXGA+, SXGA, XGA, SVGA, VGA, MAC	Operating Temperature	41-95°F (5-35°C)
Analog Wide Inputs	WUXGA, WXGA	Air Filter	Replaceable, up-to 5,500 Hours
Video Formats	NTSC / PAL / SECAM / NTSC 4.43 / PAL-M&N	User Maintenance	Clean Air Filter - Replace Filter & Lamp as Indicated
Image Signal Resizing	Smart Scaling Technology	UPC	4571194674613
Video Input Analog	480i/p, 575i/p, 720p, 1035i, 1080i	Limited Warranty: to the original end-use customer only	
		Projector	3 years
		Lamp	1 year ownership / 2,000 hours use (whichever occurs first)
		Air Filter	2 years ownership / 4,000 hours use (whichever occurs first)

Summary

The cost effective LC-XBM26W projector offers reduced maintenance and enhanced picture and sound. Here's 2,600 lumens of 3LCD imaging at XGA resolution. For less demanding rooms, consider the 2,200 lumen LC-XBM21W. For brighter rooms, consider the 3,000 lumen LC-XBM31W (which also provides slightly shorter throw ratios).

Lamp contains Mercury. Do not put in trash. Dispose of as Hazardous Waste, according to Local, State or Federal Laws.
Eiki® is a registered trademark of Eiki International, Inc. Kensington is a registered trademark of ACCO Brands Corporation.

Specifications subject to change without notice. ©2012 Eiki International, Inc. Issued July 30, 2012.

Eiki International, Inc., 30251 Esperanza, Rancho Santa Margarita, CA 92688-2132. Tel: 800-242-3454; Fax: 800-457-3454, E-mail: usa@eiki.com
In Canada: 310 First St., Unit 2, P.O. Box 156, Midland, ON L4R 4K8. Tel: 800-563-3454, Fax: 800-567-4069, E-mail: canada@eiki.com
Visit our website: <http://www.eiki.com>