




LC-XG200

XGA "G" Series Projectors

KEY FEATURES: Model LC-XG200

- 3200 ANSI Lumens, at a 800:1 contrast ratio.
- Extremely quiet operation: fan noise as low as 31 dBA in Eco-mode.
- 3 panel LCD imaging for rich, color saturated visuals.
- Weights only 17.2 lb! Compact and easy to carry and store.
- True XGA resolution. SXGA~VGA compatible. Two data inputs.
- Smart data compression / expansion, and video scaling.
- Power zoom & focus. Power lens shift. Digital keystone correction.
- Optional WideAngle & Telephoto Lenses. Quick Lens Change System.
- Wireless remote with mouse and Laser pointer. 7X digital zoom.
- Accepts DVD & HDTV Component Video, plus Composite, and S-Video Input.
- Displays all video color standards, in both 4:3 and 16:9 aspect ratio.
- Enhanced progressive scan up to 1080i, and 2-3 pulldown support.
- Optional Media Card Imager and Wireless Imager Attachments.
- 3 Year* Projector Warranty!

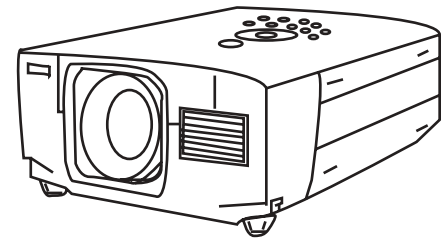

LC-XG200

Included Accessories: Owner's Manual. AC Power Cord. Lens Cover. HD15 (VGA-type) Computer Input Cable. DVI-I ~ HD15 Adapter. Wireless Remote Control With Mouse and Laser Pointer & Batteries (AA x 2). Mouse cable for computer USB, Serial RS-232. Dust cover

Optional Accessories: Replacement Lamp. DVI-I~HD15 (VGA) Input Cable. Luggage Style Carry Case with Wheels and Telescoping Handle, and Detachable Computer Compartment. ATA-Style Shipping Case with Wheels and Telescoping Handle. Ceiling Mount. Ceiling Post and Plate. 33' (10m) Mouse Extension Cable for Control Port. Media Card Imager (Compact Flash Computerless Slide Show System). Wireless Imager (Wi-Fi Content Delivery and Projector Control System). Wideangle and Telephoto Lenses.

SPECIFICATIONS: Model LC-XG200

Screen Brightness	3200 ANSI Lumens / 2560 in Eco-Mode	Data Input Channels	2
Illumination Uniformity	90%	1. Computer 1	HD15 x 1 data, Audio Stereo: MiniStereo x 1 (L&R)
Size of Color Palette	16.7 Million	2. Computer 2	DVI-I data, Audio Stereo MiniStereo x 1 (L&R)
Contrast Ratio	800:1 (Full ON/OFF)	Data Monitor Output	HD15 x 1
Horizontal Resolution	800 TV Lines	Video: System Compatibility	NTSC/PAL/SECAM/NTSC 4.43/PAL-M&N
Projection Lamp	250W UHP / operated at 200W in Eco-Mode	Video: HDTV Compatibility	480i/p, 575i/p, 720p, 1035i, 1080i, -50/60
Estimated Lamp Life	2000 Hours	Video: Formats Supported	4:3, 16:9
Imaging System	0.99" PolySilicon active matrix TFT Panels x 3	Video: Image Resizing	Video Scaling Technology
Screen Pixels	1024 x 768 in stripe configuration	Video: Systems	Composite, S-Video, Component (Y,Pb/Cb, Pr/Cr)
Total Pixels	2,359,296 ((1024 x 768) x 3)	Video: Input Channels	1
Lens Type	Power Zoom and Focus	1. Video	RCA x 1 Composite, S-Video x 1, RCA x 3 Component (Y,Pb/Cb, Pr/Cr) Audio: RCA x 2 (L&R Stereo)
Lens Specs	Speed: f:1.7~2.1; FL: 1.34~2.19 in. (34~44 mm)	Audio Amplifier	Stereo 2 Watts RMS
Lens Ratios	Zoom Max:Min: 1.3:1; Throw:Width1.69~2.19:1	Audio: Built in Speakers	Stereo: 1.8 in. (4.5cm.) x 2
Image Diagonal	30~300 in. (76.2~762cm)	Audio: Speaker Output	(Stereo) MiniStereo x 1 (8 Ohm)
Image Width	2~20 ft. (0.61~6.1 m.)	Fan Noise	36 dBA / 31 dBA in Eco-Mode
Throw Distance	3.4~43.7 ft. (1.04m~13.32 m.)	Size (HxWxD)	6.4 x 11.9 x 16.8 in. (162 x 302 x 426 mm.)
Front Elevation / Maximum Tilt	up to 10.0° up / +/- 20°		includes legs 0.8" (20.7mm) and lens cover 0.3" (7.1mm)
Anti Keystone	Power Lens Shift, Ratio (Top:Bottom) 10:0~1:1	Weight	17.2 lb. (7.8kg)
Vertical Keystone Correction	Digital: up to 30° up or down	Packaged Size (HxWxD)	13.3 x 18.0 x 24.7 in. (337 x 456 x 626 mm.)
Horizontal Keystone Correction	Digital: up to 10° left or right	Packaged Weight	27.4 lb. (12.4 kg.)
Scanning Frequency	Auto: H Sync.: 15-100kHz; V Sync.: 50-100Hz	Power Requirements	100-240V AC, 50/60Hz
Dot Clock	140 MHz	Power Consumption	350W (in Normal mode)
Image Orientation	Normal, Reversed, Inverted	Heat	1195 BTU/hr. (301 Kcal/hr.) in Normal mode
Local Control / Power Management	Full Function / Auto Shut-Off	Power Cord	10' (3M) Type 3, Detachable
Remote Proj & Mouse Control	Wireless with Laser Pointer x 1	Safety Compliance	UL, Listed
Control Ports	Mouse: USB x 1; Mouse / RS-232C: Mini DIN 8 Pin x 1	Security Facilities	Kensington® Security Slot
Computer: Native Resolution	1024 x 768 (XGA)	Operating Temperature	41~95°F (5~35°C)
Computer: Compatibility	SXGA, XGA, SVGA, VGA, MAC	User Maintenance	Clean Air Filter, Replace Lamp
Computer: Formats	1280x1024, 1024x768, 800x600, 640x480	Warranty Projector	3 Yr/6000Hr *(Parts/Labor to Correct Defects)
Computer: Image Sizing	Normal, or Smart Compressed, or Expanded	Warranty Lamp	90 Days (Failed Lamp Replaced Pro Rata)
			* Which ever occurs first

This warning is required by the US FDA and pertains to the laser pointer in the wireless remote control of this projector

Caution! Laser Radiation – Do not stare into beam. Max. Output: 1 mW. Wave Length: 650 +/- 20 nm. Class II Laser Product.

This warning is in response to requirements of the US State of Vermont and pertains to the trace elements of mercury in the lamp of this projector.

Lamp contains Mercury. Do not put in trash. Dispose of as Hazardous Waste, according to Local, State or Federal Laws

Specifications subject to change without notice. ©2003 Eiki International, Inc. Issued February 18, 2003.

Eiki International, Inc., 30251 Esperanza, Rancho Santa Margarita, CA 92688-2132. Tel: 800-242-3454; Fax: 800-457-3454, E-mail: usa@eiki.com

In Canada: 310 First St., Unit 2, P.O. Box 156, Midland, ON L4R 4K8. Tel: 800-563-3454, Fax: 800-567-4069, E-mail: canada@eiki.com

Fax-on-Demand: (Toll Free) 877-345-4329 Visit our World Wide Web site: <http://www.eiki.com>