




# LC-XGA980UE Boardroom Projector XGA Data/Video Portable

## KEY FEATURES:

- Projects true XGA/MAC19: 1024 x 768 pixels with all the clarity of 3 panel LCD technology.
- 1900 ANSI Lumens brightness. Up to a 300" diagonal (20' wide) picture.
- Compact 14.6 lb. design fits easily into airline overhead compartments.
- Smart data compression/expansion, and video scaling technology.
- Displays higher resolutions with panning, or smart compressed.
- Displays lower resolutions normal, or smart expanded.
- 160 MHz dot clock, for compatibility with most workstations.
- Wireless remote with mouse control and power zoom and focus.
- 16 increment Digital Zoom magnifies the image, not the pixels.
- 3 Year\* Projector Warranty! 6 month\* Lamp Warranty!

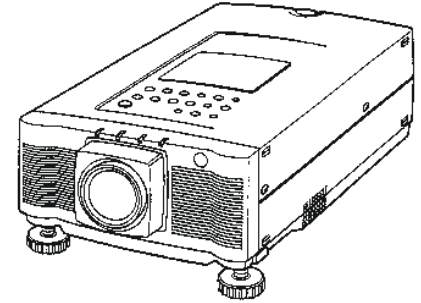

## OTHER IMPORTANT FEATURES:

- UHP (Ultra High Performance) long-life 150 Watt lamp.
- Composite & S-Video Input in NTSC, PAL, SECAM / NTSC 4.43 / PAL-M.
- Displays both Regular 4:3 and Widescreen 16:9 ratio video formats.
- International Power: 100-120 / 200-240V AC, 50/60 Hz (automatic).
- Included Accessories: Owner's Manual, AC Power Cord. VGA-type Computer Input Cable. MAC Adapter. Wireless Remote with Mouse Control & Batteries (AAA x 2). Mouse Cables for PS/2, Serial Port, ADB Port. Dust Cover.
- Optional Accessories: MAC Monitor Cable. Additional Input Cables/Adapters. Replacement Lamp. Soft Carry Bag. Luggage-Style Travel Case with Wheels and Telescoping Handle. ATA-Style Shipping Case with Wheels and Telescoping Handle. Ceiling Mount, Post and Plate.

**NOW BRIGHTER!  
1900 ANSI LUMENS**

## SPECIFICATIONS:

Screen Brightness..... 1900 ANSI Lumens  
 Illumination Uniformity..... 85%  
 Size of Color Palette ..... 16.7 Million  
 Contrast Ratio:..... 350:1 (ANSI 100:1)  
 Horizontal Resolution.....800 TV Lines  
 Projection Lamp..... 150 Watt UHP (Ultra High Performance)  
 Estimated Lamp Life & Replace Lamp at ..... 2,000 Hrs & 1000 Hrs  
 Imaging System ..... 1.3" PolySilicon TFT Panels x 3  
 Screen Pixels ..... 1024 x 768  
 Total Pixels ..... 2,359,296 ((1024 x 768) x 3)  
 Lens Type..... 1:1.3 ratio Power Zoom and Focus  
 Lens Speed & Focal Length. f:1.8~2.1; 1.91~2.48 in (48.4~62.8 mm)  
 Lens Protection ..... Auto Lens Retract  
 Image Diagonal..... 30"~300"  
 Image Width..... 2'~20' (0.61m~6.1m)  
 Throw Distance ..... 4.6'~46.1' (1.4~14.04 m)  
 Width-to-Throw Factor ..... Approximately 1.78~2.3  
 Front Elevation / Maximum Tilt..... up to 6° up (one touch)  
 Anti Keystone.....Preset Lens Offset, Ratio (Top:Bottom) 19:1  
 Scanning Frequency ....Auto: H Sync. 15-100kHz; V Sync. 50-100Hz  
 Dot Clock .....160 MHz  
 Image Orientation ..... Normal, Reversed, Inverted  
 Local Control ..... Full Function  
 Remote Control..... Wireless (IR) Projector & Mouse x 1  
 Mouse Control Port..... 12 Pin DIN x 2  
 RS-232 Control Port..... On Mouse Control Port #2: 12 Pin DIN x 1  
 Computer: Native Resolution ..... XGA/MAC19 (1024 x 768)  
 Computer: Compatibility.... SXGA, XGA, SVGA, VGA and Macintosh

Computer: Formats . 1280x1024, 1024x768, 832x624, 800x600, 640x480  
 Computer: Higher Resolutions.Displayed Panned, or Smart Compressed  
 Computer: Lower Resolutions .....Displayed Normal, or Smart Expanded  
 Computer: Channels .....2  
 Computer: Inputs.....HDB15 x 2  
 Computer: Monitor Out.....HDB15 x 1  
 Computer: Audio Input .....Stereo: MiniStereo x 2  
 Video: Compatibility.....NTSC / PAL / SECAM / NTSC 4.43 / PAL-M  
 Video: Formats Supported.....Normal 4:3 and Wide Screen 16:9  
 Video: Image Sizing ..... Video Scaling Technology  
 Video: Channels..... 1  
 Video: Inputs ..... Composite: RCA x 1; Y/C: S-Video x 1  
 Video: Output ..... Composite: RCA x 1  
 Video: Audio Input..... Stereo: RCA x 2 (L&R)  
 Audio: Amplifier .....Stereo: 2 Watts RMS each (L&R) 3 Watt peak  
 Audio: Built-in Speakers .....Stereo: 1.57 x 2.75 in. (4 x 7 cm.) x 2  
 Audio: External Speaker Output ..... Stereo: MiniStereo x 1  
 Fan Noise..... less than 45 dB  
 Size (H x W x D)..... 5.8 x 10.8 x 16.3 in. (145.5 x 272 x 412.5 mm.)  
 Weight..... 14.6 lbs. (6.6 kg)  
 Packaged Size (H x W x D) ..... 12.5x15.9 x122.2 in. (317x404x564 mm.)  
 Packaged Weight..... 22.1 lbs. (10 kg)  
 Power Requirements.....100~120V / 200~240V AC, 50/60Hz  
 Power Consumption .....250 Watts / 854 BTU/hr.  
 Power Cord ..... 10' (3M) Type 3, Detachable  
 Safety Compliance .....UL Listed  
 User Maintenance .....Clean Air Filter, Replace Lamp  
 Warranty: Projector .... 3 Yrs/6000 hr \* (Parts & Labor to Correct Defec  
 Warranty: Lamp 6 mth/1000 hr \* (Pro Rata Replacement of Failed Lamp)

\* Whichever Occurs First

Specifications subject to change without notice.

©1999 EIKI International, Inc. 6/1/1999.

Eiki International, Inc., 26794 Vista Terrace Dr., Lake Forest, CA 92630 Phone: 800-242-3454; Fax: 800-457-3454, E-mail: infousa@eiki.com  
 In Canada: 310 First St., Unit 2, P.O. Box 156, Midland, ON L4R 4K8 Tel: 800-563-3454, Fax: 800-567-4069 E-mail: infocanada@eiki.com  
 Fax-on-Demand: (Toll Free) 877-345-4329 Visit our World Wide Web site: <http://www.eiki.com>