


KEY FEATURES: Model LC-XNB2UW

- Weighs less than 9 lbs! Footprint similar to a legal notepad.
- 1000 ANSI Lumens, 90% uniformity, and 250:1 contrast ratio.
- 3 panel LCD imaging delivers eye-popping, color saturated visuals.
- True XGA resolution. SXGA, XGA, SVGA, and VGA compatible.
- Smart data compression / expansion, and video scaling.
- Power zoom and focus. Digital keystone correction.
- Wireless remote with mouse. Laser pointer. 16X digital zoom.
- Accepts Composite and S-Video Input in most major standards.
- Displays both Regular 4:3 and Widescreen 16:9 ratio video formats.
- 3 Year* Projector Warranty! 6 Month * Lamp Warranty!

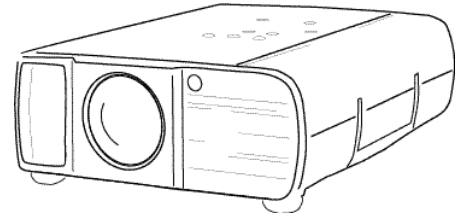

LC-XNB2UW & LC-XNB2U

INCLUDED ACCESSORIES: Owner's Manual. AC Power Cord. Lens Cover. VGA-type Computer Input Cable. Wireless Remote Control With Mouse & Batteries (AA x 2). Mouse cable for computer PS/2 Port. Dust Cover.

OPTIONAL ACCESSORIES: Replacement Lamp. MAC Adapter. MAC Monitor Cable. 9 Pin Serial cable for mouse & RS-232 communications. Mouse cable for ADB port. Soft Carry Bag. Executive Carry Case with Computer Compartment. Luggage-Style ("wheelie") Carrying Case with Wheels, Telescoping Handle, and Detachable Computer Compartment. ATA-Style Shipping Case with Wheels and Telescoping Handle. Ceiling Mount. Ceiling Post and Plate. 33' (10m) Mouse Extension Cable.

SPECIFICATIONS: Model LC-XNB2UW

Screen Brightness	1000 ANSI Lumens	Computer: Higher Resolutions	Displayed panned or Smart Compressed
Illumination Uniformity	90%	Computer: Lower Resolution	Displayed normal or Smart Expanded
Size of Color Palette	16.7 Million	Computer: Channels	1
Contrast Ratio	250:1 (Full ON/OFF)	Computer: Inputs	.HD15 x 1
Horizontal Resolution	800 TV Lines	Computer: Monitor Out	.HD15 x 1
Projection Lamp	150 Watt UHP	Computer: Audio In	Stereo: MiniStereo x 1
Recommended Lamp Replacement	1,000 Hrs.	Video: Compatibility	.NTSC / PAL / SECAM / NTSC 4.43 / PAL-M&N
Light Organization	Polarized Beam Splitter	Video: Formats Supported	.Normal 4:3 and Wide Screen 16:9
Light Distribution	Dichroic Mirror & X-Prism System	Video: Image Sizing	.Video Scaling Technology
Imaging System	.0.9" PolySilicon active matrix TFT Panels x 3	Video: Channels	1
Screen Pixels	1024 x 768 in stripe configuration	Video: Inputs	.Composite: RCA x 1, S-Video x 1
Total Pixels	2,359,296 ((1024 x 768) x 3)	Video: Audio Input	.RCA x 2 (L&R)
Lens Type	Power Zoom and Focus	Audio: Amplifier	.Mono: 1 Watts RMS
Lens Specs	Speed: f:1.7-2.0; FL: 1.31-1.7 in. (33.2-43.1 mm.)	Audio: Built In Speakers	1.58 x 1.18 in. (4x3cm) x 1
Lens Ratios	Zoom Max:Min: 1.3:1; Throw:Width: 1.80-2.33:1	Audio Line Output	.Stereo: MiniStereo x 1
Image Diagonal	.31-300 in. (78.74-762 cm.)	Fan Noise	Approximately 42 dB.
Image Width	.2-20 ft. (0.6-6.1 m.)	Size (H x W x D)	.4.1x9.5x12.8 in. (102.5x239x323 mm.)
Throw Distance	.4.6-46 ft. (1.4-14 m.)	Weight	.8.6 lbs. (3.9 kg.)
Front Elevation / Maximum Tilt	up to 10° up	Packaged Size (H x W x D)	.10.4x14.1x17.6 in. (262x356x446 mm.)
Anti Keystone	.Fixed Image Offset, Ratio (Top:Bottom) 20:1	Packaged Weight	.17.2 lbs. (7.8 kg.)
Keystone Correction	.Digital (>+/- 12 degrees)	Power Requirements	.100-240V AC, 50/60 Hz.
Dot Clock	.140 MHz.	Power Consumption / Heat	.240 Watts / 819 BTU/hr. (207 KC/hr.)
Image Orientation	.Normal, Reversed, Inverted	Power Cord	.10' (3M) Type 3, Detachable
Local Control	.Full Function	Safety Compliance	.UL Listed
Remote Proj & Mouse Ctrl	.Wireless (Infra Red) with Laser Pointer x 1	Security Facilities	.Kensington® Security Slot
Control Port (Mouse / RS-232 Communications)	.Mini DIN 8 Pin x 1	User Maintenance	.Clean Air Filter, Replace Lamp
Computer Native Resolution	1024 x 768 (XGA)	Warranty: Projector	.3 Yr. / 6000 Hr. *(Parts & Labor to Correct Defects)
Computer: Compatibility	.SXGA, XGA, SVGA, VGA	Warranty: Lamp	.6 Mo./ 1000 Hr. *(Pro-Rata Replacement of Failed Lamp)
Computer: Formats	.1280x1024, 1024x768, 800x600, 640x480		* Whichever occurs first.

The following warning is required by the US FDA and pertains to the laser pointer in the wireless remote control of this projector.

Caution! Laser Radiation – Do not stare into beam. Max. Output: 1 mW. Wave Length: 660 +/- 20 nm. Class II Laser Product.

LC-XNB2U (PC Card Model)

In addition to the features and specifications above, computerless slide shows can be created and presented with this model, using supplied software and removable flash memory. Software requires a Pentium CPU, Windows 95/98, and a minimum 32 Mb RAM and 10 Mb HD: as supplied, programming relies on notebook computer's PCMCIA slot. Includes 8 Mb SmartMedia flash memory card, PCMCIA adapter, and MCI SlideShow software on CD-ROM. More memory & other programming accessories available. Screen Brightness 1200 ANSI Lumens. MicroLens Array. Weight 8.82 lb (4.0 kg.).

Specifications subject to change without notice. ©2000 EIKI International, Inc. Printed in the USA. May 17, 2000.

Eiki International, Inc., 26794 Vista Terrace Dr., Lake Forest, CA 92630 Tel: 800-242-3454; Fax: 800-457-3454, E-mail: infousa@eiki.com
In Canada, 310 First St.- Unit 2, P.O. Box 156, Midland, ON L4R 4K8 Phone: 800-563-3454, Fax: 800-567-4069 E-mail: infocanada@eiki.com

Fax-on-Demand: (Toll Free) 877-345-4329 • Visit our World Wide Web site: <http://www.eiki.com>