




Ä-Key to better communications.

# XNB2

# XGA Notebook Two Series

## KEY FEATURES: **NEW!** Model LC-XNB2UWM

- Weighs less than 9 lbs! Footprint similar to a legal notepad.
- 1200 ANSI Lumens, 90% uniformity, and 250:1 contrast ratio.
- 3 panel LCD imaging delivers eye-popping, color saturated visuals.
- True XGA resolution. SXGA, XGA, SVGA, and VGACompatible.
- Quiet operation: fan noise as low as 39dBA.
- Smart data compression / expansion, and video scaling.
- Power zoom and focus. Digital keystone correction.
- Wireless remote with mouse. Laser pointer. 16X digital zoom.
- Accepts Composite and S-Video Input in most major standards.
- Displays both Regular 4:3 and Widescreen 16:9 ratio video formats.
- 3 Year\* Projector Warranty! 6 Month \* Lamp Warranty!

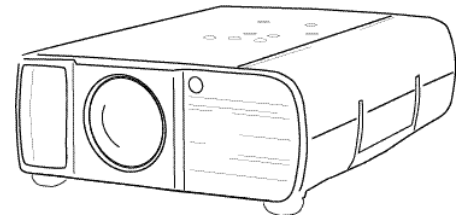

## **New!** LC-XNB2UWM

**INCLUDED ACCESSORIES:** Owner's Manual. AC Power Cord. Lens Cover. VGA-type Computer Input Cable. Wireless Remote Control With Mouse & Batteries (AAx 2). Mouse cable for computer PS/2 Port. Dust Cover.

**OPTIONAL ACCESSORIES:** Replacement Lamp. MAC Adapter. MAC Monitor Cable. 9 Pin Serial cable for mouse & RS-232 communications. Mouse cable for ADB port. Soft Carry Bag. Executive Carry Case with Computer Compartment. Luggage-Style ("wheelie") Carrying Case with Wheels, Telescoping Handle, and Detachable Computer Compartment. ATA-Style Shipping Case with Wheels and Telescoping Handle. Ceiling Mount. Ceiling Post and Plate. 33' (10m) Mouse Extension Cable.

## SPECIFICATIONS: **New!** Model LC-XNB2UWM

Screen Brightness	1200 ANSI Lumens	Computer: Higher Resolutions	Displayed panned or Smart Compressed
Illumination Uniformity	90%	Computer: Lower Resolution	Displayed normal or Smart Expanded
Size of Color Palette	16.7 Million	Computer: Channels	1
Contrast Ratio	250:1 (Full ON/OFF)	Computer: Inputs	HD15 x 1
Horizontal Resolution	800 TV Lines	Computer: Monitor Out	HD15 x 1
Projection Lamp	150 Watt UHP	Computer: Audio In	Stereo: MiniStereo x 1
Recommended Lamp Replacement	1,000 Hrs.	Video: Compatibility	NTSC / PAL / SECAM / NTSC 4.43 / PAL-M&N
Light Organization	Polarized Beam Splitter & MicroLens Array	Video: Formats Supported	Normal 4:3 and Wide Screen 16:9
Light Distribution	Dichroic Mirror & X-Prism System	Video: Image Sizing	Video Scaling Technology
Imaging System	0.9" PolySilicon active matrix TFT Panels x 3	Video: Channels	1
Screen Pixels	1024 x 768 in stripe configuration	Video: Inputs	Composite: RCA x 1, S-Video x 1
Total Pixels	2,359,296 ((1024 x 768) x 3)	Video: Audio Input	RCA x 2 (L&R)
Lens Type	Power Zoom and Focus	Audio: Amplifier	Mono: 1 Watts RMS
Lens Specs	Speed: f:1.7-2.0; FL: 1.31-1.7 in. (33.2-43.1 mm.)	Audio: Built In Speakers	1.58 x 1.18 in. (4x3cm) x 1
Lens Ratios	Zoom Max:Min: 1.3:1; Throw:Width: 1.80-2.33:1	Audio Line Output	Stereo: MiniStereo x 1
Image Diagonal	.31-300 in. (78.74-762 cm.)	Fan Noise	Approximately 39 dBA.
Image Width	.2-20 ft. (0.6-6.1 m.)	Size (H x W x D)	4.1x9.5x12.8 in. (102.5x239x323 mm.)
Throw Distance	4.6-46 ft. (1.4-14 m.)	Weight	8.6 lbs. (3.9 kg.)
Front Elevation / Maximum Tilt	up to 10° up	Packaged Size (H x W x D)	10.4x14.1x17.6 in. (262x356x446 mm.)
Anti Keystone	Digital Correction (>+/- 12°) (T:B Ratio 20:1-1:20)	Packaged Weight	17.2 lbs. (7.8 kg.)
Scanning Frequency	Auto: H Sync. 15-100Hz; V Sync. 50-100 Hz.	Power Requirements	100-240V AC, 50/60 Hz.
Dot Clock	140 MHz.	Power Consumption / Heat	240 Watts / 819 BTU/hr. (207 KC/hr.)
Image Orientation	Normal, Reversed, Inverted	Power Cord	10' (3M) Type 3, Detachable
Local Control	Full Function	Safety Compliance	UL Listed
Remote Proj & Mouse Ctrl	Wireless (Infra Red) with Laser Pointer x 1	Operating Temperature	41-95°F (5-35°C)
Control Port (Mouse / RS-232 Communications)	Mini DIN 8 Pin x 1	Security Facilities	Kensington® Security Slot
Computer Native Resolution	1024 x 768 (XGA)	User Maintenance	Clean Air Filter, Replace Lamp
Computer: Compatibility	SXGA, XGA, SVGA, VGA	Warranty: Projector	3 Yr. / 6000 Hr. *(Parts & Labor to Correct Defects)
Computer: Formats	1280x1024, 1024x768, 800x600, 640x480	Warranty: Lamp	.6 Mo./ 1000 Hr. *(Pro-Rata Replacement of Failed Lamp)

*The following warning is required by the US FDA and pertains to the laser pointer in the wireless remote control of this projector.*  
**Caution! Laser Radiation – Do not stare into beam. Max. Output: 1 mW. Wave Length: 660 +/- 20 mm. Class II Laser Product.**

### LC-XNB2U (PC Card Model)

In addition to the features and specifications of the LC-XNB2UWM, computerless slide shows can be created and presented with this model, using supplied software and removeable flash memory. Software requires a Pentium CPU, Windows 95/98, and a minimum 32 Mb RAM and 10 Mb HD: as supplied, programming relies-on notebook computer's PCMCIA slot. Includes 8 Mb SmartMedia flash memory card, PCMCIA adapter, and MCI SlideShow software on CD-ROM. More memory & other programming accessories available. Screen Brightness 1200 ANSI Lumens. MicroLens Array. Weight 8.82 lb (4.0 kg.).

Specifications subject to change without notice. ©2001 EIKI International, Inc. Printed in the USA. April 20, 2001.

Eiki International, Inc., 26794 Vista Terrace Dr., Lake Forest, CA 92630 Tel: 800-242-3454; Fax: 800-457-3454, E-mail: infousa@eiki.com  
In Canada, 310 First St.- Unit 2, P.O. Box 156, Midland, ON L4R 4K8 Phone: 800-563-3454, Fax: 800-567-4069 E-mail: infocanada@eiki.com

**Fax-on-Demand: (Toll Free) 877-345-4329 • Visit our World Wide Web site: <http://www.eiki.com>**