




LC-XNB4MS

XGA Notebook Projector

KEY FEATURES: Model LC-XNB4MS

Weight just over 9 lbs! Footprint similar to a legal notepad!
 2000 ANSI Lumens, 85% uniformity, and 350:1 contrast ratio.
 3 panel LCD imaging delivers a rich, color saturated picture.
 True XGA resolution. SXGA, XGA, SVGA, and VGA compatible.
 Quiet operation: fan noise as low as 37 dBA.
 Smart data compression / expansion, and video scaling.
 Power zoom and focus. Digital keystone correction.
 Wireless remote with mouse . 7X digital zoom.
 Accepts Composite, S, and Component Video in all major standards.
 Displays both Regular 4:3 and Widescreen 16:9 ratio video formats.
 Supports HDTV Input at 480i/p, 575i/p, 720p, 1035i, and 1080i.
 3 Year* Projector Warranty!

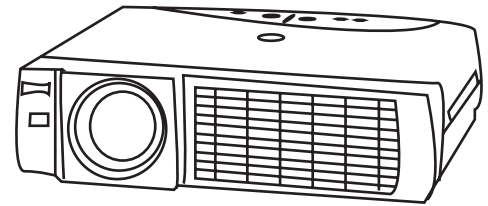

LC-XNB4MS

Included Accessories: Owner's Manual. AC Power Cord. Lens Cover. HD15 (VGA-type) Computer Input Cable with DVI-I ~ HD15 Adapter. Wireless Remote Control & Batteries (AA x 2). Mouse cable for computer PS/2 Port. Soft Carry Bag. Stereo Audio Cable. Composite Video Cable.

Optional Accessories: Replacement Lamp. MAC Adapter. MAC Monitor Cable. 9 Pin Serial cable for mouse and RS-232 communications. Mouse cable for ADB port. Executive Carry Case with Computer Compartment. Luggage-Style ("wheelie") Carrying Case with Wheels, Telescoping Handle, and Detachable Computer Compartment. ATA-Style Shipping Case with Wheels and Telescoping Handle. Ceiling Mount. Ceiling Post and Plate. 33' (10m) Mouse Extension Cable for Control Port. Media Card Imager (Compact Flash Computerless Slide Show System). Wireless Imager (Wi-Fi Content Delivery and Projector Control System).

SPECIFICATIONS: Model LC-XNB4MS

Screen Brightness	2000 ANSI Lumens	Computer: Higher Resolutions Displayed panned or Smart Compressed
Illumination Uniformity	85%	Computer: Lower Resolution Displayed normal or Smart Expanded
Size of Color Palette	16.7 Million	Computer: Channels
Contrast Ratio	350:1 (Full ON/OFF)	Computer: Inputs
Horizontal Resolution	800 TV Lines	Computer: Audio In
Projection Lamp	200 Watt UHP	Computer: Monitor Out
Estimated Lamp Life	2000 Hours	Video: Compatibility
Imaging System	0.9" PolySilicon active matrix TFT Panels x 3	Video: Formats Supported
Screen Pixels	1024 x 768	Video: Image Sizing
Total Pixels	2,359,296	Video: Channels
Lens Type	Power Zoom and Focus	Video: In
Lens Specs	Speed: f:1.9~2.1; FL: 0.84~1.01 in. (21.3~25.6 mm)	Video: Audio: Input
Lens Ratios	Zoom Max:Min: 1.2:1; Throw:Width: 1.15~1.39:1	Audio: Amplifier
Image Diagonal	31~300 in. (78.74~762 cm)	Audio: Built In Speakers
Image Width	2~20 ft. (0.6~6.1 m.)	Audio: Speaker Output:
Throw Distance	3.6~27.7 ft. (1.1~8.44 m.)	Fan Noise
Front Elevation / Maximum Tilt	up to 15.6° up / +/- 20°	Cabinet Size** (HxWxD)
Anti Keystone	Fixed Image Offset, Ratio (Top:Bottom) 9:1	Weight
Vertical Keystone Correction	Digital: up to 20° up or down	Packaged Size (H x W x D)
Horizontal Keystone Correction	Digital: up to 10° left or right	Packaged Weight
Scanning Frequency	Auto: H Sync. 15-100kHz; V Sync. 50-100Hz	Power Requirements
Dot Clock	140 MHz	Power Consumption / Heat
Image Orientation	Normal, Reversed, Inverted	Power Cord
Local Control / Power Management	Full Function / Auto Shut-Off	Safety Compliance
Remote Proj & Mouse Ctrl	Wireless (Infra Red) x 1	Security Facilities
Control Port (Mouse / RS-232)	USB x 1, Mini DIN 8 Pin x 1	Operating Temperature
Computer Native Resolution	1024 x 768 (XGA)	User Maintenance
Computer: Compatibility	SXGA, ~ VGA	Warranty: Projector
Computer: Formats	1280x1024, ~ 640x480	

Specifications subject to change without notice. ©2002 Eiki International, Inc. Issued June 12, 2001.

Eiki International, Inc., 30251 Esperanza, Rancho Santa Margarita, CA 92688-2132. Tel: 800-242-3454; Fax: 800-457-3454, E-mail: usa@eiki.com
 In Canada: 310 First St., Unit 2, P.O. Box 156, Midland, ON L4R 4K8. Tel: 800-563-3454, Fax: 800-567-4069, E-mail: infocanada@eiki.com

Fax-on-Demand: (Toll Free) 877-345-4329 Visit our World Wide Web site: <http://www.eiki.com>