

***Compact and lightweight, this inexpensive projector offers a full set of basic classroom features.***

- ◆ 3,000 ANSI lumens bright with 85% uniformity and a 500:1 contrast ratio.
- ◆ Native XGA resolution. Compatible with inputs up-to UXGA and WUXGA.
- ◆ Supports analog video input in all color standards up-to 1080i.
- ◆ 3 panel LCD imaging delivers a rich, color-saturated picture.
- ◆ 8-bit color processing yields a 16.7 million color palette.
- ◆ Convenient midrange (1.2:1) manual zoom and focus lens.
- ◆ Fixed image offset. Automatic vertical digital keystone correction.
- ◆ Two Dsub15 computer inputs. Switchable monitor output.
- ◆ Built-in 1 Watt amplifier and speaker system. Closed Caption decoding.
- ◆ Built-in wired LAN connection for projector monitoring and control.
- ◆ Variable power management. Low power consumption in Standby mode.
- ◆ Kensington® security slot. Optional local or remote keylock.
- ◆ Weighs only 5.5 lb. Compact and lightweight design.
- ◆ Wireless remote control. 50-400% digital zoom.
- ◆ 3 year projector warranty.

*Low-cost yet feature-rich, the XBL30 has been designed for affordable performance with classrooms in mind. Get 3,000 lumens of 3LCD imaging at XGA resolution. For less demanding rooms, consider the 2,600 lumen LC-XBL25, or the 2,200 lumen LC-XBL20 (both with slightly longer throw ratios).*

# LC-XBL30



**3,000 Lumens • XGA • 3LCD  
Brilliant Series Projector**

**Our Brightest Entry-Level Projector  
No Compromise: Real XGA Resolution  
Wired Network Connection  
Closed Caption Decoding**




**EIKI**  
Projectors... and more!

**SPECIFICATIONS:**

Brightness	up-to 3,000 ANSI Lumens
Contrast Ratio	up-to 500:1
Illumination Uniformity (corner to center)	85%
Resolution and Aspect Ratio	XGA (1024x768), 4:3
Color Reproduction	8-bit (16.7 million colors)
Projection Lamp	220 Watts UHP
Estimated Lamp Life	up-to 4,000 Hours
Imaging System	0.63 in (16 mm) LCD Panels x 3
Total Pixels	2,359,296 ((1024x768) x 3)
Scanning Frequency	Auto: H: 15-100 kHz; V: 50-100 Hz
Pixel Clock	up-to 140 MHz
Lens	Attached - Manual Zoom and Focus
Lens Specs	Speed: f: 2-2.15; FL: 0.7240.869 in (18-22 mm)
Lens Ratios	Zoom Max:Min 1.2:1; Throw:Width 1.43-1.72:1
Image Diagonal	40-300 in (102-762 cm)
Image Width	2.67-20 ft (0.84-6.1 m)
Throw Distance	3.6-34.4 ft (1.1-10.5 m)
Projector Elevation Adjustment (legs)	up-to 10° Up
Maximum Pitch	up-to 30° Up or Down
Vertical Lens Shift (% of image height)	Fixed: 31% Up
Vertical Keystone Correction	Digital: up-to 30° Up or Down
Image Orientation	Normal, Reversed, Inverted
Local Control / Power Management	Full Function/Auto Shutdown
RS232 Control Port	Dsub9 x 1
Remote Projector Control	Wireless (Infra Red) x 1
LAN Port	RJ45 x 1
Computer Input in Pixels	up-to 1600x1200 (4:3), 1920x1200 (16:10)
Analog 4x3 Inputs	UXGA, SXGA+, SXGA, XGA, SVGA, VGA, MAC
Analog Wide Inputs	WUXGA, WSXGA+, WXGA+, WXGA
Video Formats	NTSC / PAL / SECAM / NTSC 4.43 / PAL-M&N
Image Signal Resizing	Smart Scaling Technology
Video Inputs Analog	480i/p, 575i/p, 720p, 1035i, 1080i
Image Signal Inputs	
1. Computer	Dsub15 x 1
Component Video (with optional adapter), 3RCA	
S-Video (with included adapter)	
2. Computer / Component	Dsub15 x 1
Switchable Monitor Output	
3. Composite Video.	RCA x 1
Audio Signal Inputs	
For computer or video audio.	Stereo: MiniStereo x 1
Outputs	
Computer Monitor (Computer 2)	Dsub15 x 1
Audio Output	Variable, Stereo: MiniStereo x 1
Amplifier	Stereo: 1 Watt
Speaker	1.1 in (2.8 cm) x 1 (Mono)
Fan Noise	as low as 29 dBA
Cabinet Size (HxWxD)	3.4 x 13 x 9.3 in (8.52 x 33.4 x 24.7 cm)
	(excluding legs)
Weight	5.5 lb (2.5 kg)
Packaged Size (HxWxD)	8.4 x 16.9 x 16.2 in (21.3 x 42.9 x 41.1 cm)
Packaged Weight	10.4 lb (4.7 kg)
Power Requirements	100-240V AC, 50/60Hz
Power Consumption:	0.4 W in Eco Standby mode, up-to 295 W
Heat:	1.4 BTU/hr in Eco Standby mode, up-to 1,007 BTU/hr
Power Cord	10 ft (3 m) Type C13 detachable
Electrical Safety Compliance	IEC, UL/CUL
Electromagnetic Compatibility	FCC Class B, CE Mark
Security Facilities	Kensington® Security Slot
Operating Temperature	41-95°F (5-35°C)
User Maintenance	Clean Air Filter, Change Lamp
UPC	4571194674149
Limited Warranty: to the original end-use customer only	
Projector:	3 Years
Lamp:	6 months ownership / 500 hours use (whichever occurs first)

EIKI® is a registered trademark of Eiki International, Inc.

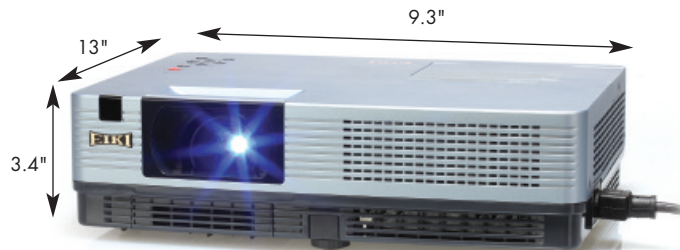

LC-XBL30 - XGA • 3LCD Brilliant Series Projector




Just connect, and project.



Local control.



Remote control.



**INCLUDED ACCESSORIES:**

Quick Start Guide, Owner's Manual on CD-ROM, Network Software on CD-ROM, Power Cord, Lens Cover, S-Video Input Cable (Dsub15 to S-Video), VGA Computer Input Cable (Dsub15 to Dsub15), Wireless Remote Control (with 2 AAA Batteries).

**OPTIONAL ACCESSORIES:**

Soft Carry Bag, Replacement Lamp, Component Video Input Cable (Dsub15 to 3RCA), Ceiling Mount, Ceiling Post & Plate.

**Eiki International, Inc.**  
 30251 Esperanza, Rancho Santa Margarita, CA 92688-2130  
 Tel: 800-242-3454; Fax: 800-457-3454, E-mail: usa@eiki.com  
 In Canada, 310 First St. Unit 2, P.O. Box 156, Midland, ON L4R 4K8  
 Phone: 800-563-3454, Fax: 800-567-4069 E-mail: canada@eiki.com  
<http://www.eiki.com>

